





Ordering code

2WBC3030 WR-F-2XNP N L B XX N 00 B

① Series No.
 ② Connector type: WR=Right angle
 ③ Mounting type: F=With foot
 ④ No. of circuits
 ⑤ N=Halogen Free
 ⑥ Material: L=LCP,UL94V-0
 ⑦ Color: B=Black
 ⑧ Plating code for contacts: G1=Gold-flash
 T1=Tin-plated
 ⑨ Plating code for solder tabs: N=Non-plating
 ⑩ Option code: 00=Standard
 ⑪ Packing code: B=Tray

SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass

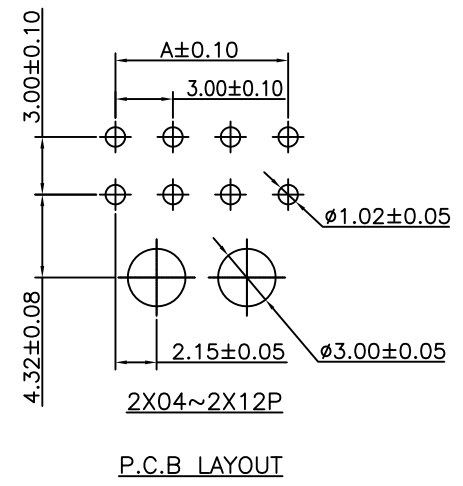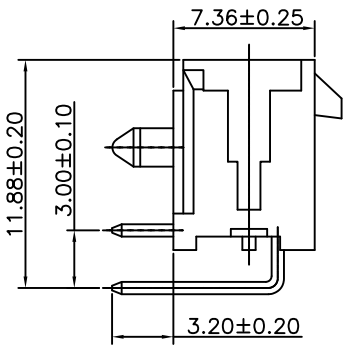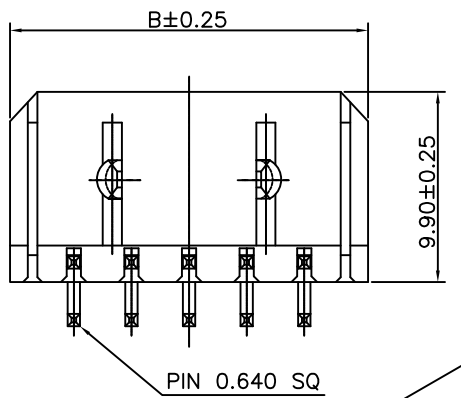

Ordering Information & Dimensions

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|----------|------------|-------|----------|------------|-------|
| | A | B | | A | B |
| 2X01P | --- | 6.65 | 2X07P | 18.00 | 24.65 |
| 2X02P | 3.00 | 9.65 | 2X08P | 21.00 | 27.65 |
| 2X03P | 6.00 | 12.65 | 2X09P | 24.00 | 30.65 |
| 2X04P | 9.00 | 15.65 | 2X10P | 27.00 | 33.65 |
| 2X05P | 12.00 | 18.65 | 2X11P | 30.00 | 36.65 |
| 2X06P | 15.00 | 21.65 | 2X12P | 33.00 | 39.65 |

| REV. | DESCRIPTION | DATE | NAME | GENERAL TOLERANCE |
|------|--------------|------------|------|-------------------|
| A1 | EN1409020004 | 2014.09.02 | 郭本思 | X.X±0.25 |
| A0 | NEW RELEASE | 2014.04.03 | 郭本思 | X.XX±0.15 |
| | | | | X.XXX±0.05 |


Singatron Enterprise Co., Ltd.

| | | | |
|--------------|-----------------------------------|-----------------|----------------------------------------|
| TITLE | 3.00mm PITCH 90° WAFER, MICRO-FIT | | |
| DWN | 郭本思 2014.04.03 | PART NO. | 2WBC3030WR-F-2XNPNLBT1N00B |
| CHKD | | SCALE | 1:1 UNIT: mm |
| APVD | 陳序純 2014.04.03 | SIZE: | A3 SHEET: 1 OF 2 REV: A1 |


CUSTOMER COPY




2X01P




2X05P




2X09P

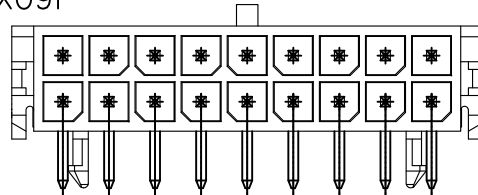


2X02P




2X06P




2X10P

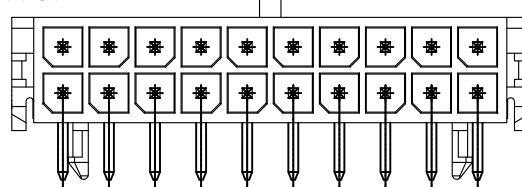


2X03P




2X07P

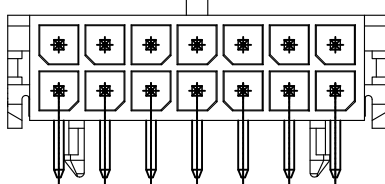


2X11P

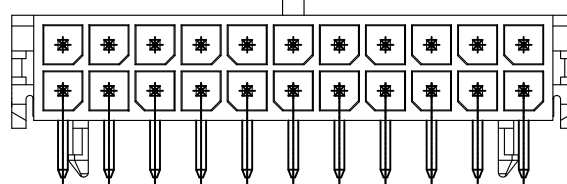


2X04P



2X08P

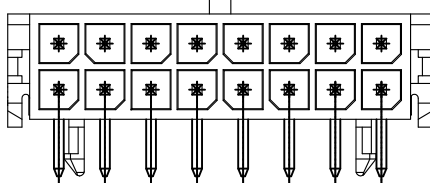

2X12P

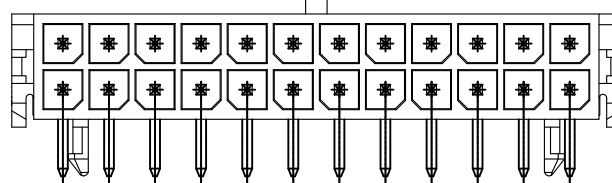

| | | | | |
|------|--------------|------------|------|-------------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| A1 | EN1409020004 | 2014.09.02 | 郭本思 | X. X±0.25 |
| A0 | NEW RELEASE | 2014.04.03 | 郭本思 | X. XX±0.15 |
| REV. | DESCRIPTION | DATE | NAME | X. XXX±0.05 |

GENERAL TOLERANCE

| | | | |
|---------------------------------------|-----------------------------------|-----------|----------------------------|
| Singatron Enterprise Co., Ltd. | | | |
| TITLE | 3.00mm PITCH 90° WAFER, MICRO-FIT | | |
| DWN | <small>郭本思 2014.04.03</small> | PART NO. | 2WBC3030WR-F-2XNPNLBT1N00B |
| CHKD | | SCALE 1:1 | UNIT: mm |
| APVD | <small>陳序純 2014.04.03</small> | SIZE: A3 | SHEET: 2 OF 2 REV: A1 |
| CUSTOMER COPY | | | |