

P/N LEGEND

2WBC4255HF -XP N 0 W NP N 00 G
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩











- ① Series No.
- ② Connector type: HF=Receptacle
- ③ No. of circuits
- ④ N=Halogen Free
- ⑤ Material: 0=Nylon 66-V0
- ⑥ Color: W=White
- ⑦ Plating code: NP=Non-plating
- ⑧ Plating code: N=Non-plating
- ⑨ Option code:
00=Standard
- ⑩ Packing code: G=Bag

SPECIFICATIONS


Current Rating: 9A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: White

Ordering Information & Dimensions


PART NO.	Dimensions	
	A	B
2WBC4255HF-02P	4.20	9.60
2WBC4255HF-03P	8.40	13.80
2WBC4255HF-04P	12.60	18.00
2WBC4255HF-05P	16.80	22.20

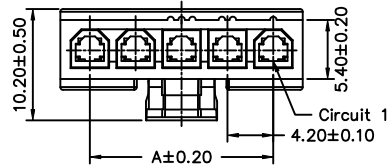

3P



4P,5P



2P

REV.	DESCRIPTION	DATE	NAME	GENERAL TOLERANCE	ANGLE±
A0	NEW RELEASE	2016.05.30	徐富永	X.X±0.25	ANGLE±
				X.XX±0.15	
				X.XXX±0.05	

Singatron Enterprise Co., Ltd.			
TITLE	4.20mm PITCH HOUSING-RECEPTACLE, SINGLE ROW, MINI-FI		
DWN	徐富永 2016.05.30	PART NO. 2WBC4255HF-XPDOWNPN00G	
CHKD		SCALE 1:1	UNIT: mm
APVD	董正一 2016.05.30	SIZE: A3	SHEET: 1 OF 1 REV: A0
CUSTOMER COPY			