




A-A SEC

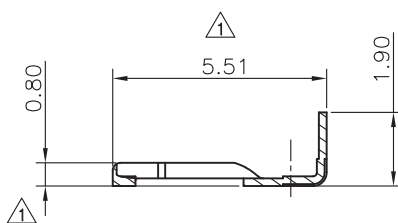


B-B SEC



C-C SEC



D-D SEC

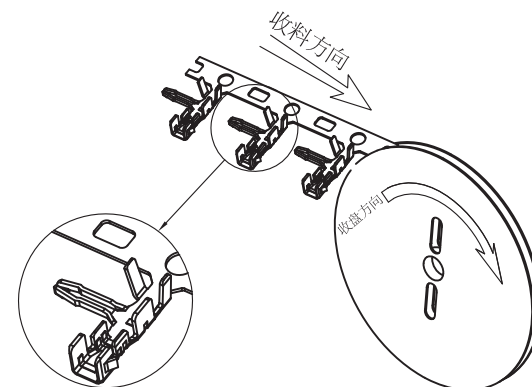

3D VIEW



# ■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1000M $\Omega$  min
- Temperature Range : - 25 $^{\circ}$ C to + 85 $^{\circ}$ C
- Contact Resistance : 10m $\Omega$  max

# ■ TERMINAL

Part No. : 2WT1137R-TXX

Ordering Code ①

## ① Material&Stamping :

T: Phos. Bronze , Stamping after Plating  
TP: Phos. Bronze , Stamping before Plating  
TB: Brass, Stamping after Plating  
TBP: Brass, Stamping before Plating

- Applicable Wires : AWG#22-28
- Material : Refer the above options
- Finish :  
2WT1137R-T:80u" min.TIN over 15u" min. NICKEL  
2WT1137R-TP:120u" min.TIN over 30u" min. NICKEL  
2WT1137R-TB:80u" min.TIN over 15u" min. NICKEL  
2WT1137R-TBP:120u" min.TIN over 30u" min. NICKEL
- Thickness : 0.2 mm
- Q' ty : 10000 pcs./Reel

TOLERANCE	LTR	REVISION RECORD	NAME	DATE
.0	±0.30	① 修改尺寸公差及修改物性表	黃廣珍	13/8/19
.00	±0.20	②		
.000	±0.10	③		
ANGLE		④		
0°	±1°	⑤		
.0°	±	⑥		
SHEET	1/1	⑦		

Singatron Enterprise Co., Ltd.

TITLE 2.50mm Board in Connectors Terminal

DWN 黃廣珍 PART NO. 2WT1137R-Txx

CHKD 周家慶 SCALE 1:1 UNIT: mm

APVD 張育瑞 SIZE: A3 SHEET:1 OF 1 REV: a 1

CUSTOMER COPY