
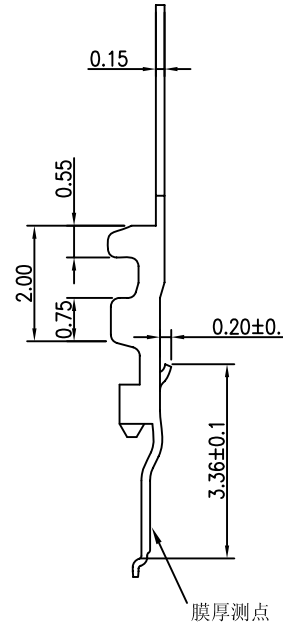


REV.	ECN.NO	REVISIONS	REV.DRAWN	DATE
F	----	增加膜厚测点, 换图框。	hejihuai	2009/04/2

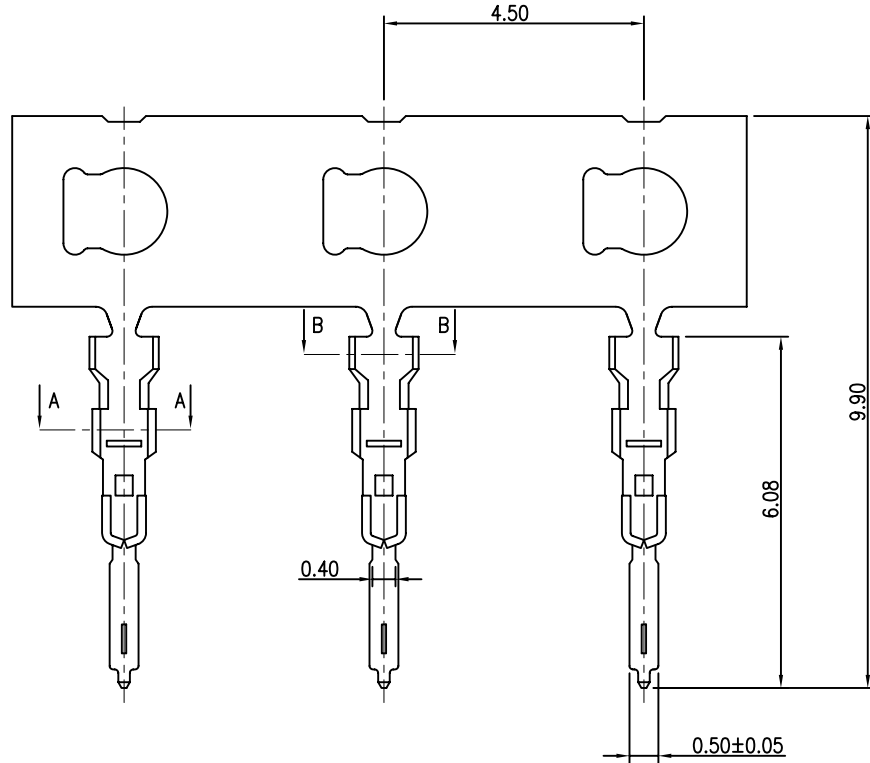

SPECIFICATION

- . Voltage Rating : 200V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage : 500V AC/Minute
- . Insulation Resistance : 100MΩ Min.
- . Temperature Range : -40°C~+80°C
- . Contact Resistance : 40mΩ Max.

NOTES:

1. Material: Copper Alloy
2. Finish: Gold Plated/Tin Plated/Matte Sn
3. Applicable Wires: AWG#30~36
4. Q'ty : 20,000 Pcs/Reel
5. Part No.
2WT1266-TXX

Tin Plated


- 2: Sn>100μ" Ni>30μ"
- 3: Sn>150μ" Ni>50μ"

Matte sn


- M2: Sn>100μ" Ni>30μ"

Gold Plated


- G0: Au>0.8μ" Ni>30μ"
- G1: Au>3μ" Ni>30μ"
- G2: Au>5μ" Ni>50μ"
- G3: Au>8μ" Ni>50μ"
- G4: Au>15μ" Ni>50μ"



SECTION A-A



SECTION B-B



Singatron Enterprise Co., Ltd.

x.	±0.40	x'	±5.0'	TITLE	WIRE TO BOARD CONNECTOR			
.x	±0.30	.x'	±2.0'	DWN	hejihuai	PART NO. 2WT1266-TXX		
.xx	±0.20	.xx'	±1.0'	CHKD	2009/04/25	SCALE 1:1	UNIT: mm	④
.xxx	±0.10	---	---	APVD	XUWEI	SIZE: A3	SHEET: 1 OF 1	REV: F
CUSTOMER COPY								