

REV.	ECN.NO	REVISIONS	REV.DRAWN	DATE
G	---	增加膜厚测点, 换画框	hejihuai	2009/04/27
H	09077	1.05尺寸改公差	hejihuai	2009/05/11
I	---	增加T4电镀规格	Asimo	2009/09/01

SPECIFICATION

- . Voltage Rating : 200V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage : 500V AC/Minute
- . Insulation Resistance : 100MΩ Min.
- . Temperature Range : -40°C~+85°C
- . Contact Resistance : 40mΩ Max.

NOTES:






1. Material: Copper Alloy
2. Applicable Wires: AWG#28~32
3. Q'ty : 15,000 Pcs/Reel
4. Part No.

2WT1285-TXX

Tin Plated

Gold Plated

- 2: Sn>100μ " Ni>30μ "
- 3: Sn>150μ " Ni>50μ "
- 4: Sn> 50μ " Ni>10μ "
- G0: Au>0.8μ " Ni>30μ "
- G1: Au>3μ " Ni>30μ "
- G2: Au>5μ " Ni>50μ "
- G3: Au>8μ " Ni>50μ "
- G4: Au>15μ " Ni>50μ "

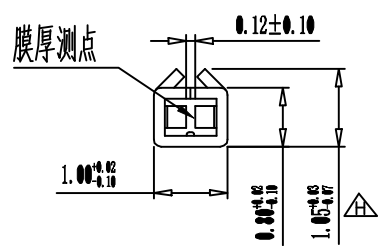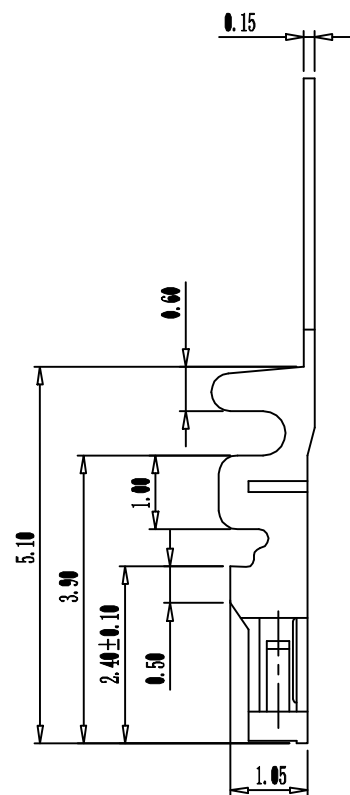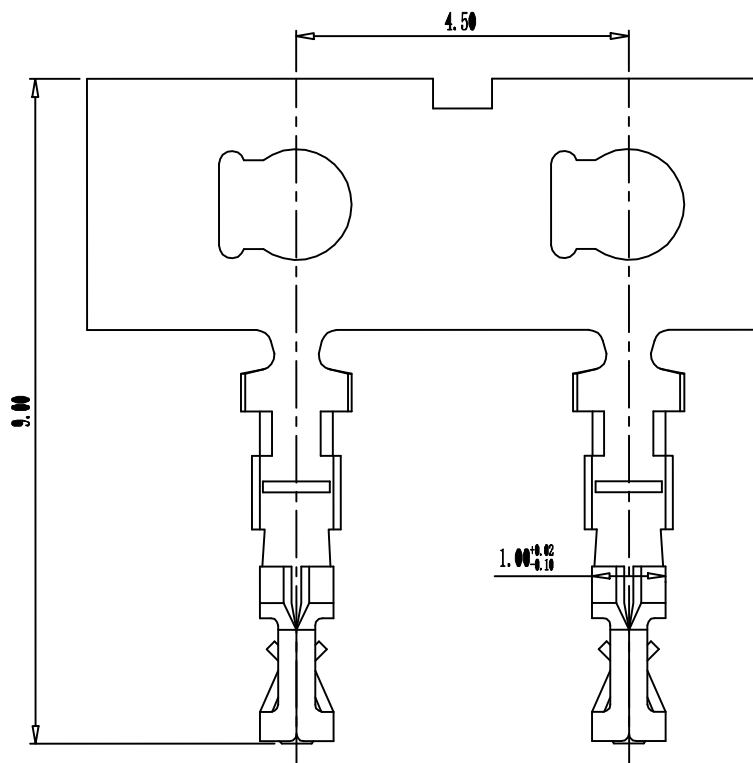

X.	±0.50	X.*	±3*
.X	±0.30	.X*	±2*
.XX	±0.15	.XX*	±1.0*
.XXX	±0.05	---	---

Singatron Enterprise Co., Ltd.

TITLE	Wire to board connectors		
DWN	ASMO 2009/09/01	PART NO.	2WT1285-TXX
CHKD		SCALE	1:1 UNIT: mm
APVD	XJNEI 2009/09/01	SIZE: A3	SHEET: 1 OF 1 REV: 1

CUSTOMER COPY