


1 2 3 4 5 6 7 8

F  
E  
D  
C  
B  
A

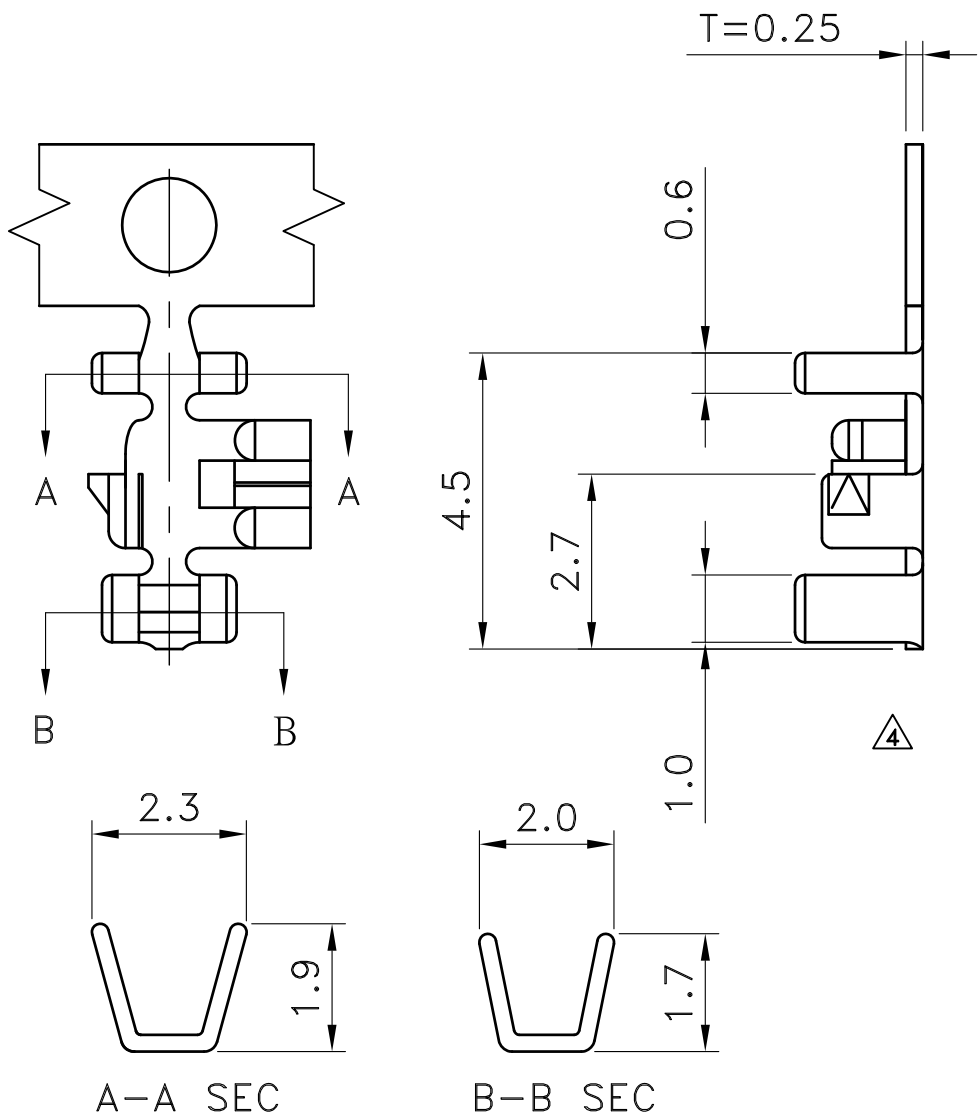


■ SPECIFICATIONS

- ▲ Voltage Rating : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max

■ TERMINAL

- Part No. : 2WT2005-TX<sup>①</sup>

- ▲ ① Blank : Tin Plated Over Nickel  
P : Pressing Before Tin Plated Over Nickel
- Applicable Wires : AWG # 24 - 26
- Material : Phosphor. Bronze
- Finish : Tin Plated
- Thickness : 0.25mm
- Q' ty : 15,000 pcs./Reel

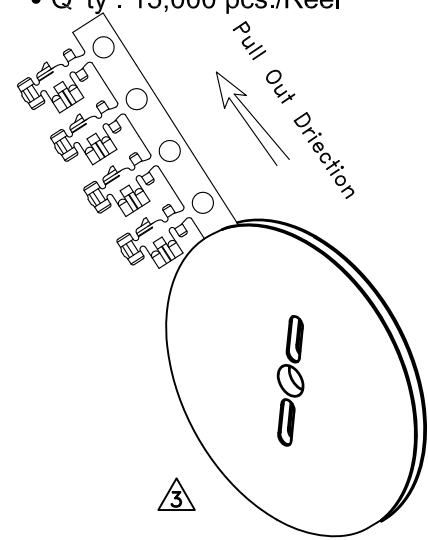

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
.0	±0.30	▲ ECR 200707-012	黄科源	2007/05/17	▲			
.00	±0.20	▲ ECR 200808-016	黄科源	2007/06/09	▲			
.000	±0.10	▲ 增加端子捲绕方向圖	吴弘文	2014/10/24	▲			
ANGLE		▲ 修正側視圖	吴弘文	2014/10/28	▲			
0°	±1°	▲ 修定額定電壓	吴弘文	2014/12/24	▲			
.0°	±	▲			▲			
SHEET	1/1	▲						

Singatron Enterprise Co., Ltd.

TITLE	2.00mm crimp style Connectors Terminal			
DWN	吴弘文	PART NO.	2WT2005-TX	
CHKD	周慈雲	SCALE	1:1	UNIT: mm
APVD	张育瑞	SIZE:	A3	SHEET: 1 OF 1 REV: a5
CUSTOMER COPY				

CUSTOMER  
Conforms to The RoHS Instruction

1 2 3 4 5 6 7 8