

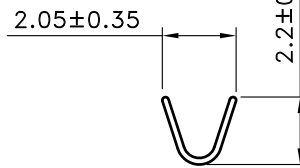
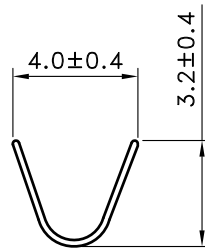


■ SPECIFICATIONS

- Voltage Rating : 250 V AC/DC
- Current Rating : 5 A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25°C to + 105°C
- Contact Resistance : 20m Ω max

■ TERMINAL


- Part No. : 2WT23158BS-2
- Applicable Wires : AWG # 18 - 24
- Material : Brass
- Finish : Tin Plated
- Thickness : 0.2 mm
- Q' ty : 7,000 pcs./Reel



A-A SEC

B-B SEC

C-C SEC

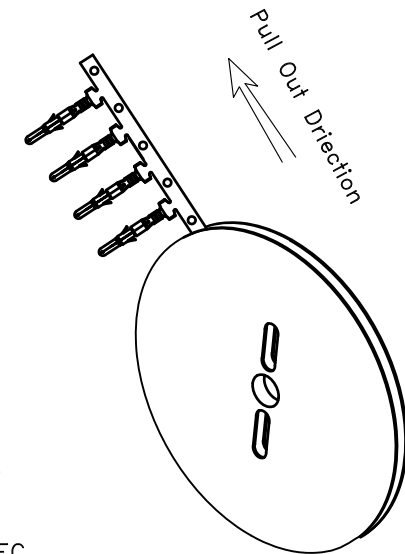

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME
.0	±0.30	1	林文彬	2006/12/20	1		
.00	±0.20	2	黃科源	2009/05/07	2		
.000	±0.10	3	吳弘文	2014/10/23	3		
ANGLE		修定物性表規格		吳弘文	2014/12/31		
0°	±1°	4			4		
.0°	±	5			5		
SHEET	1/1	6			6		

Singatron Enterprise Co., Ltd.

TITLE	Ø1.58mm Power Connectors Terminal		
DWN	吳弘文	PART NO.	2WT23158BS-2
CHKD	周慈雲	SCALE	1:1 UNIT: mm
APVD	張育瑞	SIZE	A3 SHEET: 1 OF 1 REV: a4

CUSTOMER

Conforms to The RoHS Instruction

CUSTOMER COPY