


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A	/	初版发行	YU	06-11/09
B	/	修改电镀规格	sunquan	11-05/17

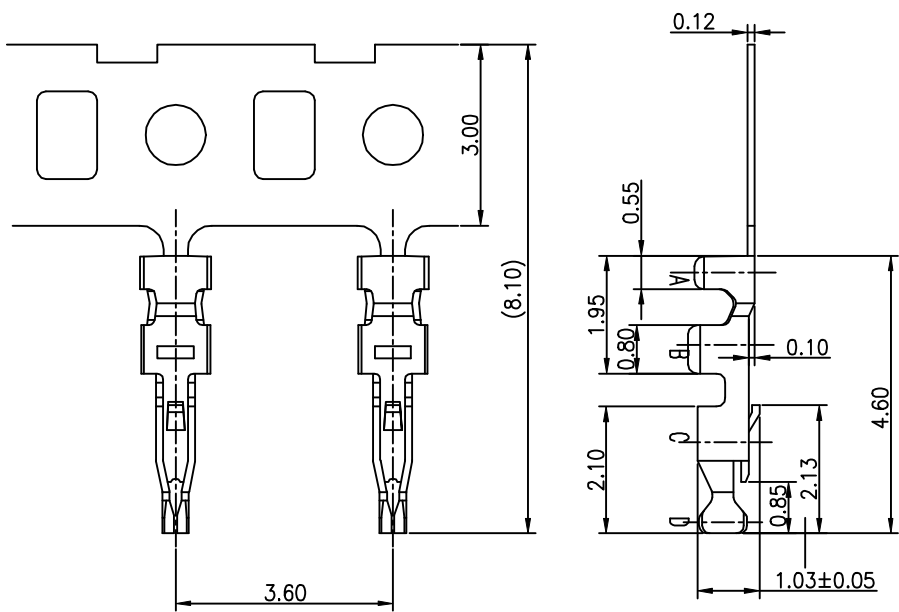


SPECIFICATIONS:

- . Voltage Rating: 80V AC
- . Current Rating: 1.0A
- . Withstanding Voltage: AC 250V/minute
- . Insulation Resistance: 500MΩ MIN
- . Contact Resistance: 30mΩ MAX
- . Temperature Range: -35°C to 85°C

TERMINAL

- . Part No Legend: 2WT2453-TXX

- Tin Plated T2: Sn>100u" Ni>30u"
- Gold Plated G0: Au>0.8u" Ni>30u"
- G1: Au>3u" Ni>30u"
- G2: Au>5u" Ni>50u"
- G3: Au>8u" Ni>50u"
- G4: Au>15u" Ni>50u"
- . Applicable Wires: AWG#28-36
- . Material: Copper Alloy
- . Thickness: 0.12mm
- . Q'ty: 15,000pcs/Reel

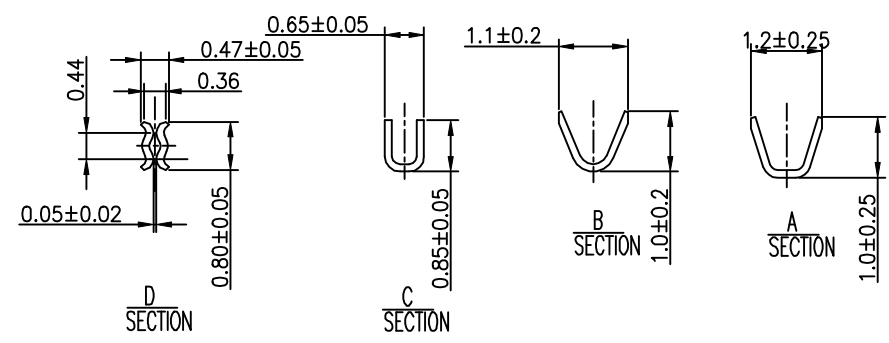

Singatron Enterprise Co., Ltd.					
TITLE	0.9PITCH WIRE TO BOARD CONNECTOR				
DWN	sunquan	PART NO. 2WT2453-TXX			
CHKD	11-05/17	SCALE 1:1	UNIT: mm		
APVD	liuzhiwen	SIZE: A3	SHEET: 1 OF 1	REV: B	
CUSTOMER COPY					

X.± 0.40	X°.± 5.0°
.X± 0.30	.X°.± 2.0°
.XX± 0.20	.XX°.± 1.0°
.XXX± 0.10	.XXX°.± 0.5°