


- SPECIFICATIONS
- △ Voltage Rating : 250V AC/DC
 - Current Rating : 3A AC/DC
 - Withstanding Voltage : 1,500V AC/minute
 - Insulation Resistance : 500MΩ min
 - Temperature Range : -25°C to +85°C
 - Contact Resistance : 10 milliohms Max.

- TERMINAL
- Part No. : 2WT6503-TX

- ① Material:
- Blank : Phos. Bronze
 - B : Brass

- Applicable Wires : AWG# 22 - 28
- Finish : Tin Plated
- Thickness : 0.2mm
- Q' ty : 7,000 pcs./Reel

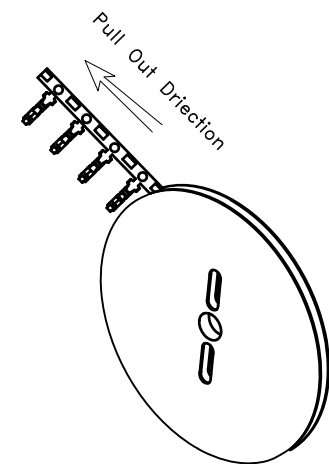

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
.0	±0.30	△1	產品材質變更	林文彬	2006/12/30	△2		
.00	±0.20	△2	合併圖面&修改料號敘述	王誠賢	2011/07/25	△3		
.000	±0.10	△3	修正產品外觀	吳弘文	2013/09/01	△4		
ANGLE		△4	修正產品外觀	吳弘文	2014/10/24	CUSTOMER		
0°	±1°	△5	物性表更新	吳弘文	2015/10/23			
.0°	±	△6				Conforms to The RoHS Instruction		
SHEET	1/1	△7						

Singatron Enterprise Co., Ltd.

TITLE **2.50mm Wire to Wire Connector**

DWN 吳弘文 PART NO. 2WT6503-TX

CHKD 周慈雲 SCALE 1:1 UNIT: mm

APVD 張育瑞 SIZE: A3 SHEET: 1 OF 1 REV: d5

CUSTOMER COPY