




1 2 3 4 5 6 7 8







■ SPECIFICATIONS

- Current Rating : 3A AC/DC
- Withstanding Voltage : 1500V AC/minute
- Insulation Resistance : 500MΩ min
- Temperature Range : - 25°C to + 85°C

■ PLUG HOUSING

- Part No. : 2WW6503-XX
- Poles : 1. 02~12 (Single Row)  
2. 16~18 (Double Row)
- Material : Nylon 66 UL94V-0
- Q' ty : 1000 pcs./Bag








11 Circuit





12 Circuit

16 Circuit

18 Circuit

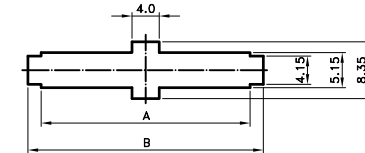

2~12 Circuit (Single Row)




7 Circuit





8 Circuit

9 Circuit

10 Circuit

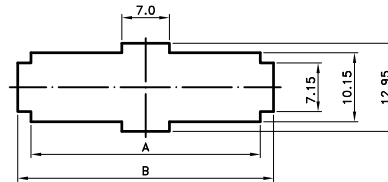

16~18 Circuit (Double Row)



2 Circuit

3 Circuit

4 Circuit

5 Circuit

6 Circuit

Circuit	Dim/mm		Circuit	Dim/mm	
	A	B		A	B
2	5.7	9.6	9	23.2	27.1
3	8.2	12.1	10	25.7	29.6
4	10.7	14.6	11	28.2	32.1
5	13.2	17.1	12	30.7	34.6
6	15.7	19.6	16	20.7	24.6
7	18.2	22.1	18	23.2	27.2
8	20.7	24.6			

TOLERANCE		LTR	REVISION RECORD	DATE
.0	±0.3	ECR	200504-002	05/04/18
.00	±0.2	ECR	200804-031	08/04/30
.000	±0.1	ECR	201005-005	10/05/12
ALL	±			
ANGLE				
0°	±			
.0°	±			

Singatron Enterprise Co., Ltd.

TITLE	2.50mm Wire to Wire Connector			
DWN	王誠賢	PART NO. 2WW6503-XX		
CHKD	黃科源	SCALE 1:1	UNIT: mm	☉
APVD	張育瑞	SIZE: A3	SHEET: 1 OF 1	REV: A4

CUSTOMER COPY