


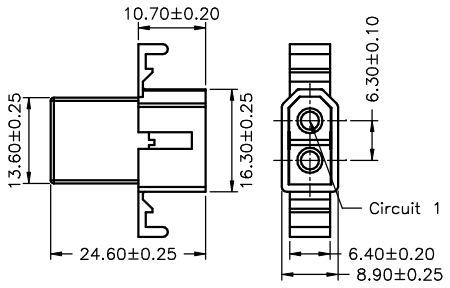
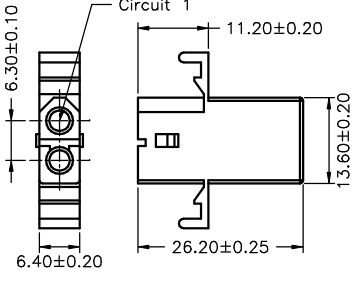


Ordering Information & Dimensions

2WWC5030HM(A)	2WWC5030HF(A)
 <p>2WWC5030HM-1P</p>	 <p>2WWC5030HF-1P</p>
 <p>2WWC5030HM-2P 2WWC5030HMA-2P (WITHOUT MOUNTING EAR)</p>	 <p>2WWC5030HF-2P 2WWC5030HFA-2P (WITHOUT MOUNTING EAR)</p>

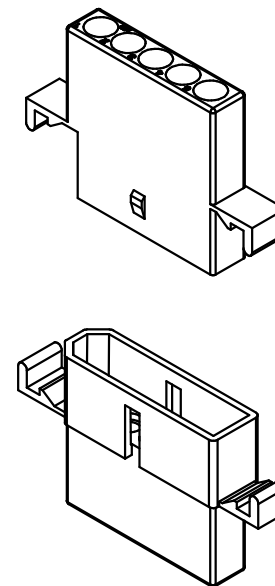

SPECIFICATIONS

Current Rating: 12A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2
Color: Natural(Translucent)


Singatron Enterprise Co., Ltd.

TITLE	5.03mm PITCH HOUSING			
DWN	蕭惠鳳	PART NO.	2WWC5030HX(A)-XP	
CHKD	2002.10.02	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE: A3	SHEET: 1 of 5	REV: B0
CUSTOMER COPY				

			GENERAL TOLERANCE	
B0	NEW RELEASE	2006.03.08	X. X±0.25	ANGLE±
REV.	DESCRIPTION	DATE	X. XX±0.15	▷⊙
			X. XXX±0.05	

Ordering Information & Dimensions

2WWC5030HM(A)	2WWC5030HF(A)
<p>2WWC5030HM-3P 2WWC5030HMA-3P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-3P 2WWC5030HFA-3P (WITHOUT MOUNTING EAR)</p>
<p>2WWC5030HM-4P 2WWC5030HMA-4P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-4P 2WWC5030HFA-4P (WITHOUT MOUNTING EAR)</p>

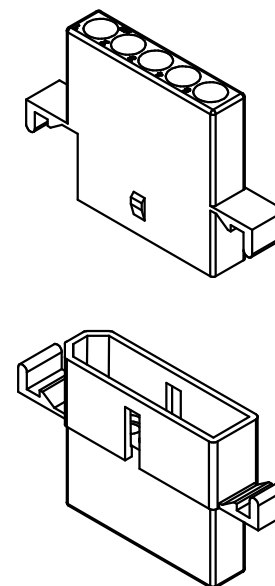

SPECIFICATIONS

Current Rating: 12A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2
Color: Natural(Translucent)

Singatron Enterprise Co., Ltd.


TITLE	5.03mm PITCH HOUSING			
DWN	蕭惠鳳	PART NO.	2WWC5030HX(A)-XP	
CHKD	2002.10.02	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE	A3	SHEET: 2 of 5
CUSTOMER COPY				REV: B0

GENERAL TOLERANCE			ANGLE±
X. X±0.25			
X. XX±0.15			
X. XXX±0.05			

BO	NEW RELEASE	2006.03.08
REV.	DESCRIPTION	DATE

Ordering Information & Dimensions

2WWC5030HM(A)	2WWC5030HF(A)
<p>2WWC5030HM-5P 2WWC5030HMA-5P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-5P 2WWC5030HFA-5P (WITHOUT MOUNTING EAR)</p>
<p>2WWC5030HM-2X2P 2WWC5030HMA-2X2P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-2X2P 2WWC5030HFA-2X2P (WITHOUT MOUNTING EAR)</p>

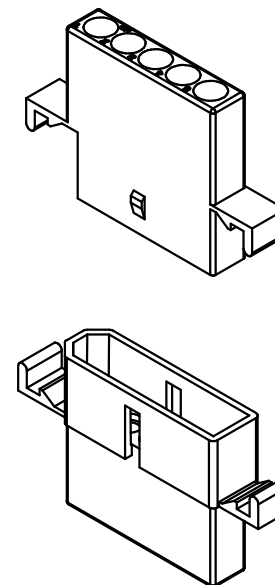

SPECIFICATIONS

Current Rating: 12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

Color: Natural(Translucent)


Singatron Enterprise Co., Ltd.

TITLE	5.03mm PITCH HOUSING			
DWN	蕭惠鳳	PART NO.	2WWC5030HX(A)-XP	
CHKD	2002.10.02	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE	A3	SHEET: 3 of 5
CUSTOMER COPY				REV: B0

GENERAL TOLERANCE			ANGLE±	
X. X±0.25				
X. XX±0.15				
X. XXX±0.05				
BO	NEW RELEASE	2006.03.08		
REV.	DESCRIPTION	DATE		

Ordering Information & Dimensions

2WWC5030HM(A)	2WWC5030HF(A)
<p>2WWC5030HM-3X2P 2WWC5030HMA-3X2P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-3X2P 2WWC5030HFA-3X2P (WITHOUT MOUNTING EAR)</p>
<p>2WWC5030HM-3X3P 2WWC5030HMA-3X3P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-3X3P 2WWC5030HFA-3X3P (WITHOUT MOUNTING EAR)</p>

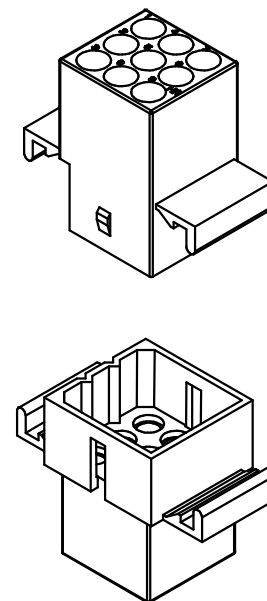

SPECIFICATIONS

Current Rating: 12A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

Singatron Enterprise Co., Ltd.


TITLE	5.03mm PITCH HOUSING			
DWN	蕭惠鳳	PART NO.	2WWC5030HX(A)-XP	
CHKD	2002.10.02	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE	A3	SHEET: 4 of 5
REV: B0				CUSTOMER COPY

GENERAL TOLERANCE			ANGLE±	
X. X±0.25				
X. XX±0.15				
X. XXX±0.05				

BO	NEW RELEASE	2006.03.08
REV.	DESCRIPTION	DATE

Ordering Information & Dimensions

2WWC5030HM(A)	2WWC5030HF(A)
<p>2WWC5030HM-3X4P 2WWC5030HMA-3X4P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-3X4P 2WWC5030HFA-3X4P (WITHOUT MOUNTING EAR)</p>
<p>2WWC5030HM-3X5P 2WWC5030HMA-3X5P (WITHOUT MOUNTING EAR)</p>	<p>2WWC5030HF-3X5P 2WWC5030HFA-3X5P (WITHOUT MOUNTING EAR)</p>

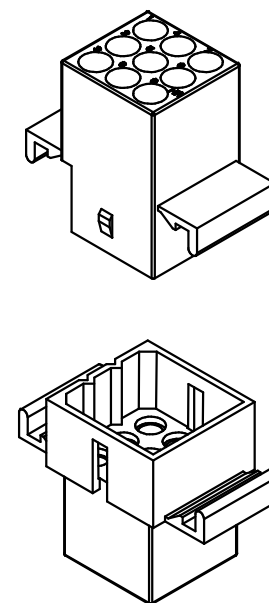

SPECIFICATIONS

Current Rating: 12A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

Singatron Enterprise Co., Ltd.

TITLE	5.03mm PITCH HOUSING			
DWN	蕭惠鳳	PART NO.	2WWC5030HX(A)-XP	
CHKD	2002.10.02	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE	A3	SHEET: 5 of 5
REV: B0				
CUSTOMER COPY				

GENERAL TOLERANCE			ANGLE±	
X. X±0.25				
X. XX±0.15				
X. XXX±0.05				

BO	NEW RELEASE	2006.03.08
REV.	DESCRIPTION	DATE