

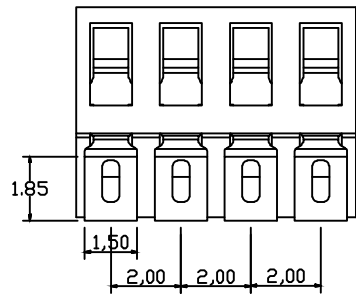
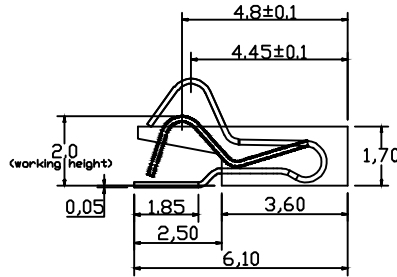


1 2 3 4 5 6 7 8

REV.	ECN NO.	DESCRIPTION	DRAWN	APPD.

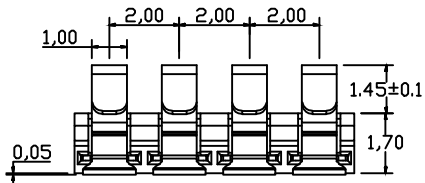

Note:
 1.Materials:
 1.1 Housing: Thermoplastic UL94V-0
 1.2 Contact: Copper Alloy Gold plating
 2.Main features:
 2.1 Rating current: 2.0A.
 2.2 Rating voltage: 12V
 2.2 Contact resistance: 30mΩ MAX.
 2.3 Insulation resistance: 500MΩ MIN .
 2.4 Withstanding voltage: 500V AC.
 2.7 Operating Temperature: -40°C~+85°C.

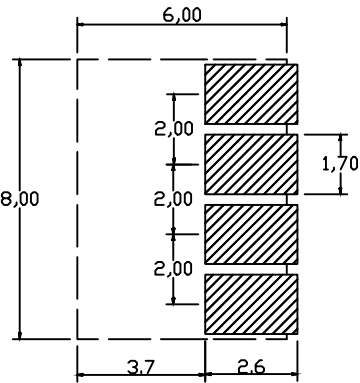

RECOMMENDED PCB LAYOUT
REFERENCE TOLERANCE: ±0.05

Singatron Enterprise Co., Ltd.					
TITLE Battery 2.0 Pitch 4P SMT Type					
GENERAL TOLERANCE		DWN	VICKY 2017/08/15	PART NO. 2BA22201-A170200	
XX. ±	XXX. ±	CHKD	ALICE 2017/08/15	SCALE 1:1	UNIT: mm
.X ± 0.25	X.* ± 3*	APVD	JAMES 2017/08/15	SIZE: A3	SHEET:1 OF 1
.XX ± 0.20	.X* ± 2*	REV: 1			
CUSTOMER COPY					

1 2 3 4 5 6 7 8