
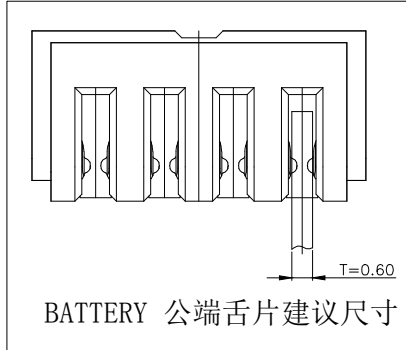

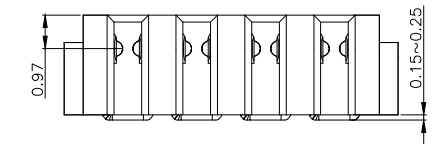
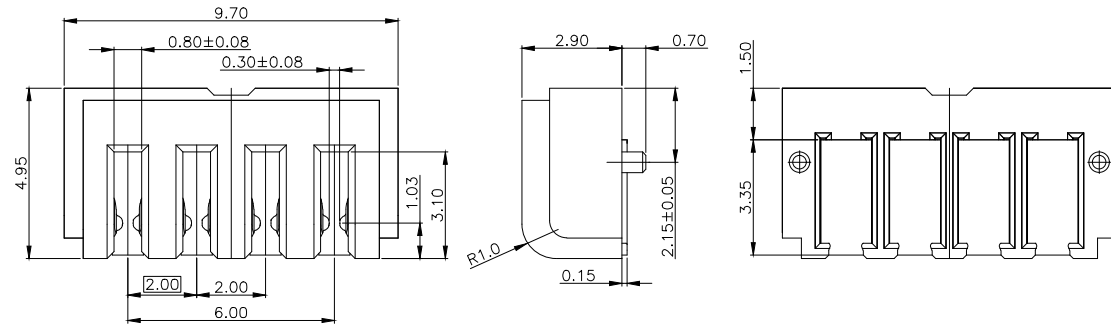


1 2 3 4 5 6 7 8

REV.	ECN NO.	DESCRIPTION	DRAWN	APPD.

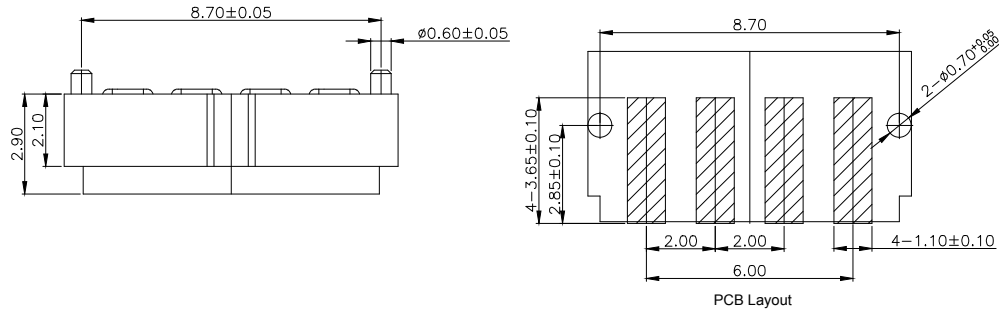

SPECIFICATION

1. Mechanical performance:
 - 1.1 Insertion and extraction force:0.1~2.0kgf,
 - 2.2 Durability :3000 cycles .
2. Electrical and environment performance
 - 2.1 Current rating:1A
 - 2.2 Voltage rating:8V
 - 2.3 Insulation resistance:100MΩ Min. at 500V DC(After Testing)
 - 2.4 Terminal contact resistance:30mΩ Max.
 - 2.5 Withstanding voltage:500V(r.m.s.)AC at 1mA Max. for one minute
 - 2.6 Operating temperature: -20 ~ +80

Singatron Enterprise Co., Ltd.

GENERAL TOLERANCE		TITLE	BATTERY Pitch 2.0 4P R/A SMT Type with post H:2.90		
XX. ±	XXX. ±	DWN	AMT 2016/07/08	PART NO. 2BA22204-A290201	
X. ± 0.30	.XXX ± 0.05	CHKD	ALICE	SCALE 1:1	UNIT: mm
.X ± 0.25	X.° ± 3°	APVD	JAMES	SIZE: A3	SHEET:1 OF 1 REV: 1
.XX ± 0.20	.X° ± 2°	CUSTOMER COPY			

1 2 3 4 5 6 7 8