

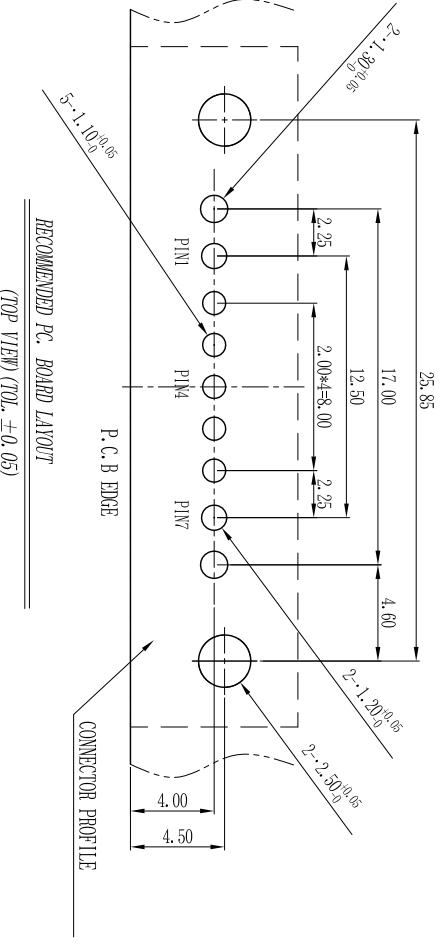
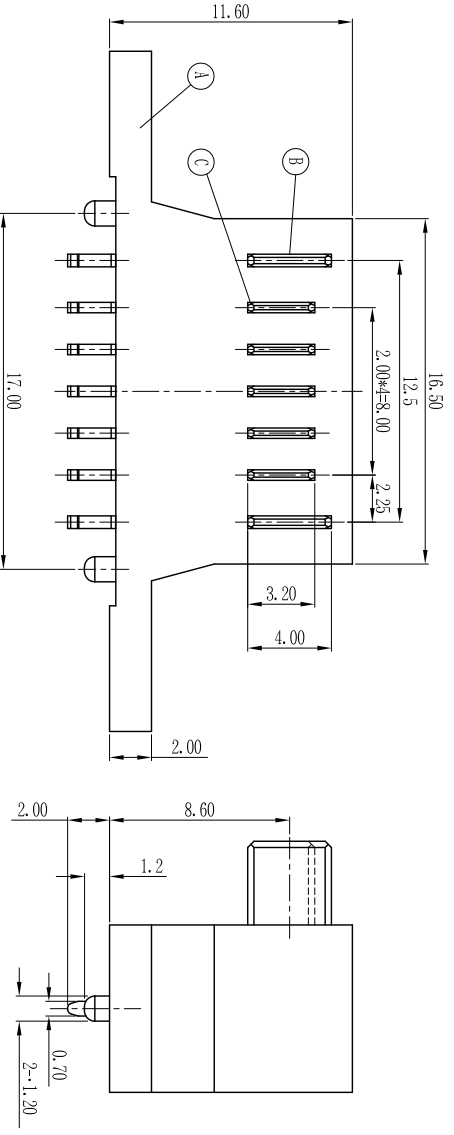
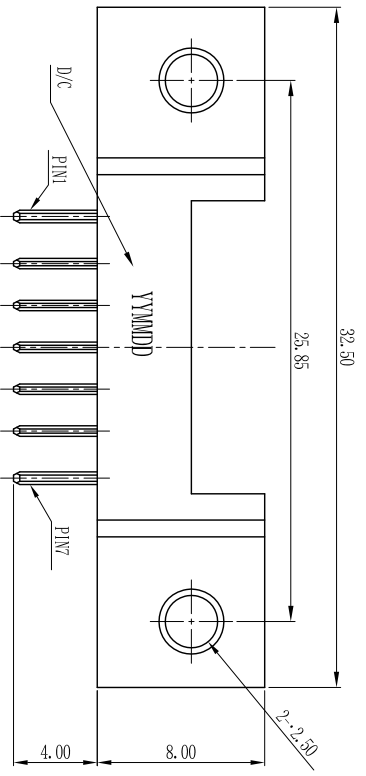


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	INITIAL RELEASE	CHRS	12/30/10

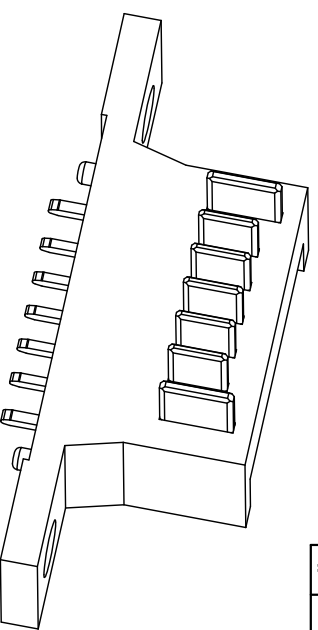

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 30V 7A MAX PER CONTACT.
 - CONTACT RESISTANCE: 30m MAX (INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 0.18-1.5 KGF.
 - WITHDRAWAL FORCE: 0.15-1.2KGF.
 - LIFE TEST: 5,000 CYCLES MIN.
 - TEMPERATURE RANGE: -20-185° C
 - OTHER GENERAL SPEC. TO REFER "28A21XX SPEC".
 - TO CONFORM TO SINGATTON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
 - FOR REELOW SOLDERING LEAD-FREE PROCESS.
 - PACKING: TRAY
- PART NO: 28A2Y03 - 000 1 1 1 F



C	CONTACT 2	5	C2880R-H T=0.5mm	GOLD FLASH
B	CONTACT 1	2	C2880R-H T=0.6mm	GOLD FLASH
A	BODY	1	LCP HIGH TEMP. THERMOPLASTIC UL 94V-0 MATERIAL	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singaton Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE	2.0mm PITCH BATTERY CONN
X: ±0.5	X: ±2°	DWG	CHRS 12/30/10
X.X: ±0.3	X.X: ±1°	CHKD	TONY 01/08/11
X.XX: ±0.2		APVD	SEAN 01/08/11

PART NO.	28A2Y03-000111F
SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	10/1
REV.	A

CUSTOMER COPY

