
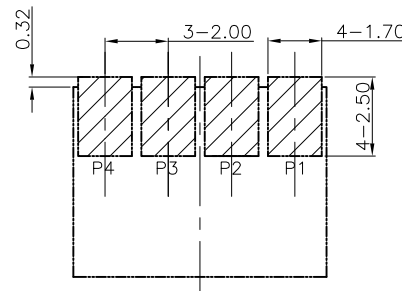


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A.	PDR NO: T111021-7A	FLY-LIU	2012.4.2

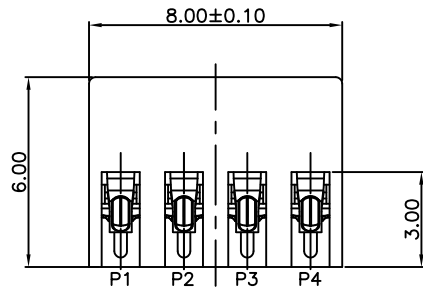

Recommended P. C. B Layout

TOLERANCE=±0.03 (TOP VIEW)

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

- 1-1. CONTACT RESISTANCE: 30m Ω MAX.
- 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100VAC FOR 1 MINUTE
- 1-3. INSULATION RESISTANCE: 150VDC 100M Ω MIN .




2.MECHANICAL PERFORMANCES:

- 2-1 NORMAL FORCE:100g MIN.
- 2-2 LIFE TEST: 5,000 CYCLES.
- 2-3 OPERATING TEMPERATURE: -40°C ~ +85°C



3.HALOGEN PRODUCT IDENTIFICATION MARK ON JACK: ④

4.HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: ④

5.PACKAGING : TAPE & REEL.

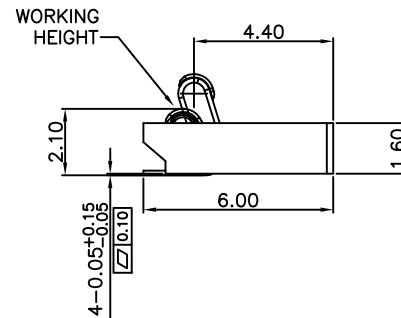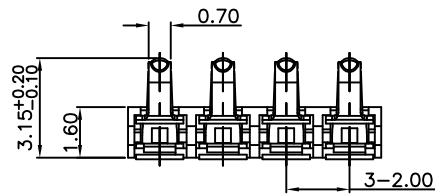

模號

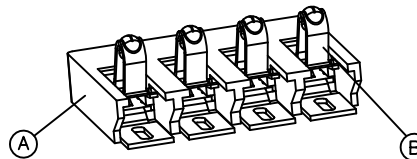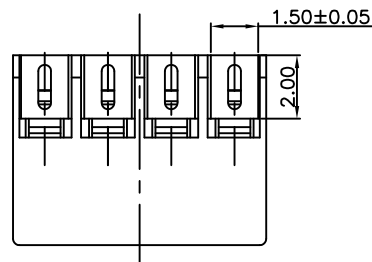

3D VIEW

B	TERMINAL	4	Be-Cu,T=0.15	Au 10µin PLATING ON CONTACT AREA, G/F ON SOLDER TAIL AREA 50µin NICKEL UNDER PLATING OVERALL
A	BODY	1	HIGH THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:		ANGLES:		TITLE
X	:±0.5	X	:±2°	DWN fly 2012.4.19
X.X	:±0.3	X.X	:±1°	CHKD boye 2012.4.19
X.XX	:±0.2			APVD tony 2012.4.19
				BATTERY CONNECTOR
				PART NO:2BA3007-014111F
		SCALE:4:1	UNIT: mm	④
		SIZE: A3	SHEET:1 OF 1	REV: A
CUSTOMER COPY				