
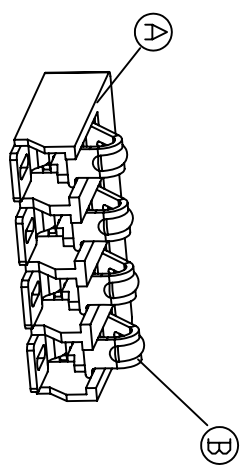
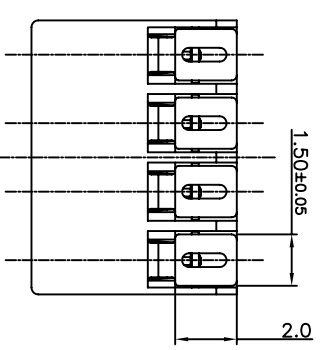



RECOMMENDED P.C.B LAYOUT
 (TOP VIEW) TOLERANCE ±0.05mm

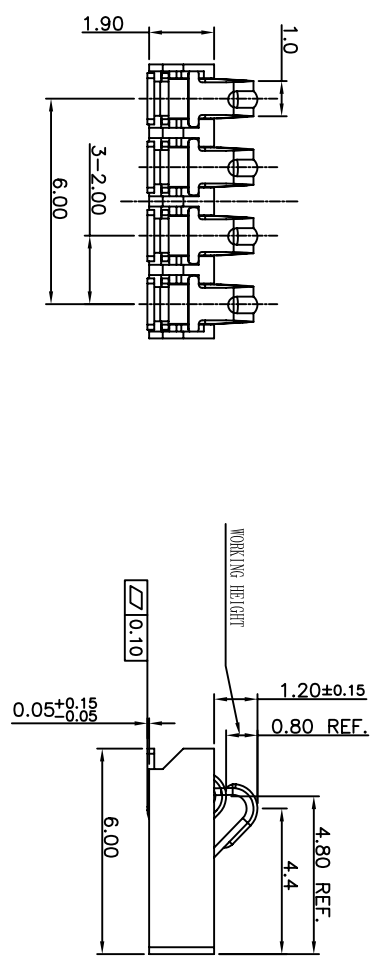

- NOTES:
1. MATERIAL SEE TABLE.
 2. ELECTRICAL PERFORMANCES:
 - 2.1 CONTACT RESISTANCE: 30 mΩ Max.
 - 2.2 INSULATION RESISTANCE: 1000 MΩ Min.
 3. MECHANICAL PERFORMANCES:
 - 3.1 NORMAL FORCE: 100g Min.(WORKING:0.8mm)
 - 3.2 LIFE TEST: 5000 CYCLES.
 - 3.3 OPERATING TEMPERATURE: -40°C TO 85°C
 4. GREEN PRODUCT IDENTIFICATION MARK ON BODY:
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 6. FOR LEAD-FREE PRODUCT.
 7. SOLDERING HEAT RESISTANCE: 260°C 10 SEC.
 8. TO CONFORM TO THE SINGATRON HSF SPECIFICATION.
 9. PACKAGING: TAPE & REEL

B	CONTACT	4	COPPER ALLOY ,T=0.2	GOLD PLATING
A	BODY	1	HIGH TEMP. THERMOPLASTIC UL94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信言企業股份有限公司				
TITLE BATTERY				
DWG P-001 2008.04.21 PART NO. 2BA3010-004111				
CHKD 2008.04.21 SCALE 8:1 UNIT: mm				
APVD 2008.04.21 SIZE: A3 SHEET: 1 OF 1 REV: A				

CUSTOMER COPY(SZ)