


RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCE ±0.05mm

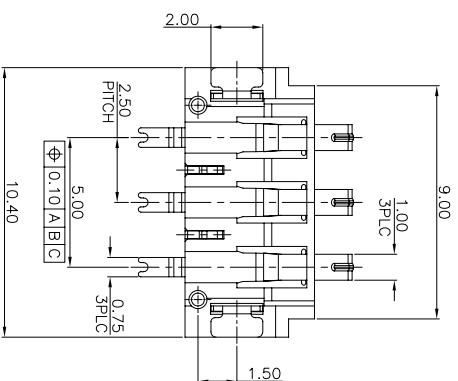

- NOTES:
1. MATERIAL SEE TABLE.
 2. ALL DIMENSIONS ARE IN MILLIMETERS.
 3. ELECTRICAL PERFORMANCES:
 - 3.1 CONTACT RESISTANCE: 50 mΩ MAX.
 - 3.2 INSULATION RESISTANCE: 1000 MΩ MIN.
 4. MECHANICAL PERFORMANCES:
 - 4.1 REACTION FORCE: 100g MIN(WORKING); 1.10mm)
 - 4.2 MECHANICAL OPERATION: 5000 CYCLES.
 - 4.3 OPERATING TEMPERATURE: -40°C TO 85°C
 5. GREEN PRODUCT IDENTIFICATION MARK IN BODY:
 6. GREEN PRODUCT IDENTIFICATION LABEL IN PACKING:
 7. FOR LEAD-FREE PRODUCT:
 8. SOLDERING HEAT RESISTANCE: 260°C 10 SEC.
 9. TO CONFORM TO THE"SE-01-001" &"ROHS DIRECTIVE".

G.P.PASS

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO: 20061129-2-S	BOYE.QI	03/12/07	

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	LOCK	2	BRASS;T=0.30	TIN PLATING
C	PAD	2	BRASS;T=0.20	TIN PLATING
B	CONTACT	3	COPPER ALLOY;T=0.12	GOLD PLATING
A	BOAY	1	HIGH TEMP.	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	2.50 PITCH 3 PIN BATTERY CONN.
DWN	DATE: 03/12/07
CHKD	SCALE: 5/1
APVD	SIZE: A3
	SHEET: 1 OF 1

CUSTOMER COPY(SZ)

Singatron Enterprise Co., Ltd.
信普企業股份有限公司