

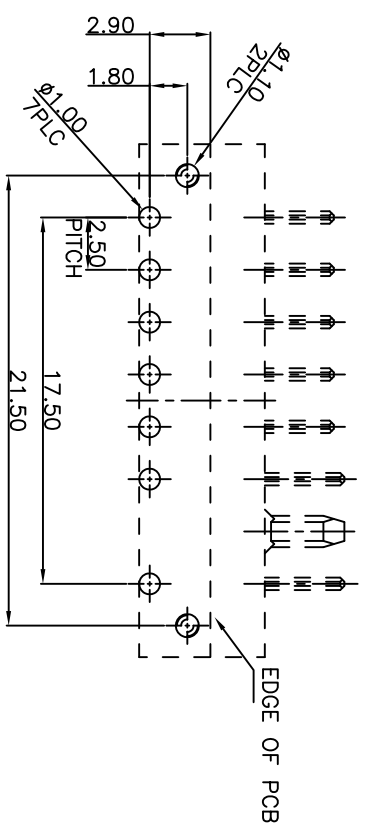
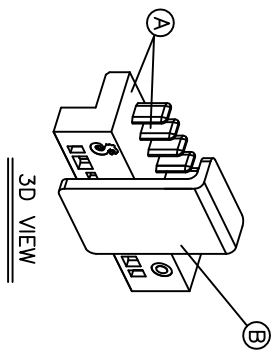
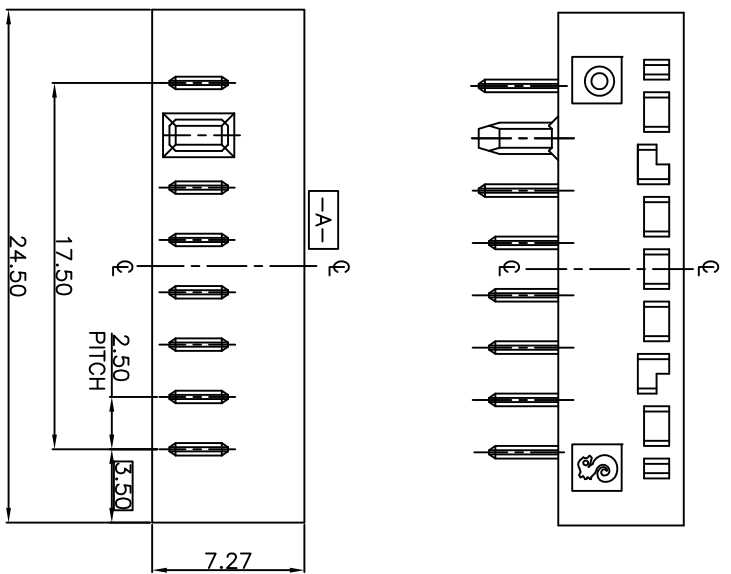


REV/ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: S100618-1A	BOYE.QI 2010.08.24

- NOTES:
- ELECTRICAL PERFORMANCE:
    - CONTACT RESISTANCE: 20 mΩ MAX.
    - INSULATION RESISTANCE: 1000 MΩ MIN.
    - DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MINUTE.
  - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
  - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:

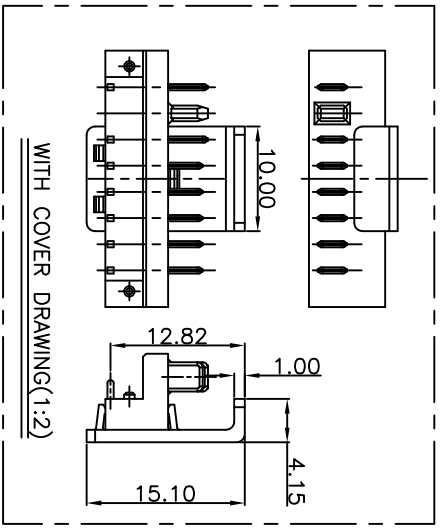

RECOMMENDED P.C.B LAYOUT(TOP VIEW)  
TOLERANCE ±0.05mm(T=1.10mm)

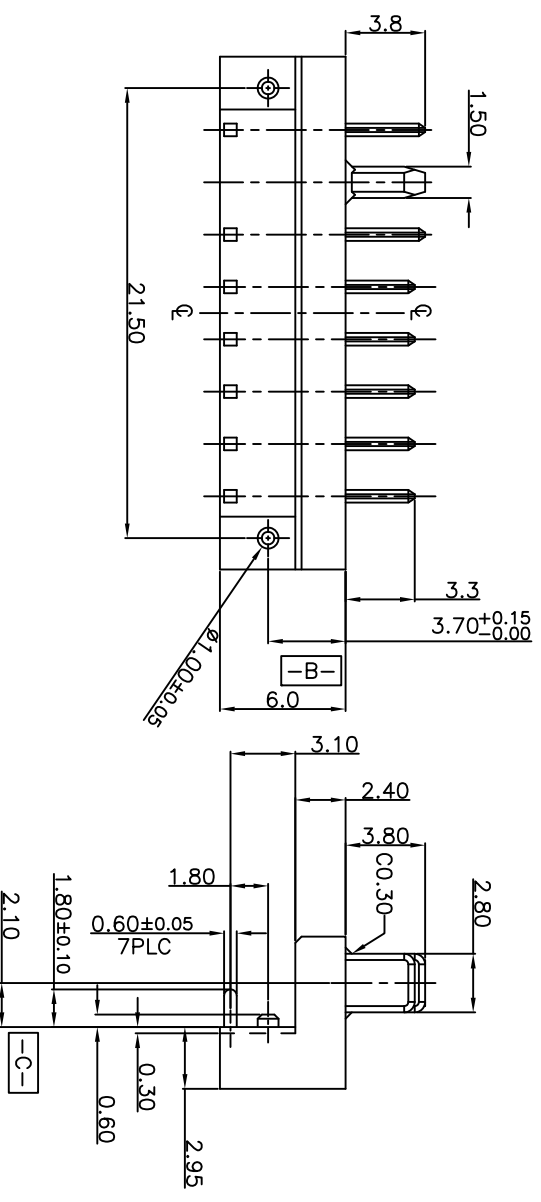

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
B	COVER	1	HIGH TEMPERATURE THERMOPLASTIC UL 94V-0	BLACK
A	INSERT-MOLDING (BODY+TERMINAL)	7	BRASS,T=0.60±0.02	Au 10u" in the contact area. Sn plating in the solder tail area W/ underplating over oil.
		1	HIGH TEMPERATURE THERMOPLASTIC UL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES	ANGLES:
DECIMALS: X	±0.25
X.X	±0.15
X.XX	±0.10

TITLE	BATTERY CONN. MALE , DIP
DWN	DATE: 2010.08.24
CHKD	SCALE: 5:1
APVD	UNIT: mm
	SIZE: A3
	SHEET: 1 OF 1
	REV: A

Singaton Enterprise Co., Ltd.  
信音企業股份有限公司  
BATTERY CONN. MALE , DIP

PART NO. 2BA3015-011111  
SCALE: 5:1  
UNIT: mm  
SIZE: A3  
SHEET: 1 OF 1  
REV: A

CUSTOMER COPY