

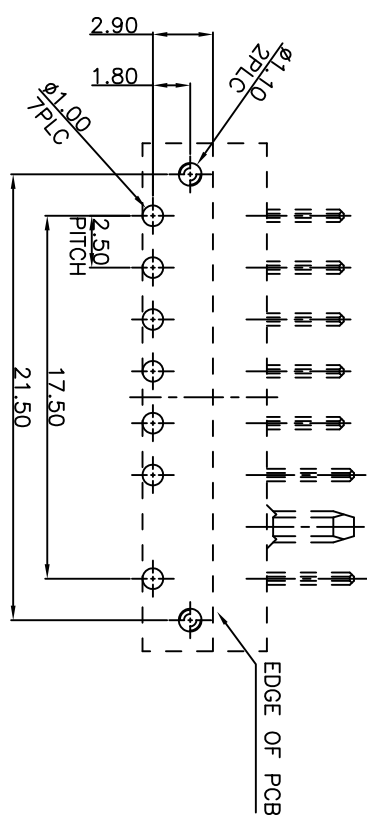
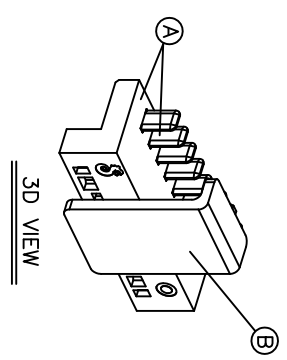
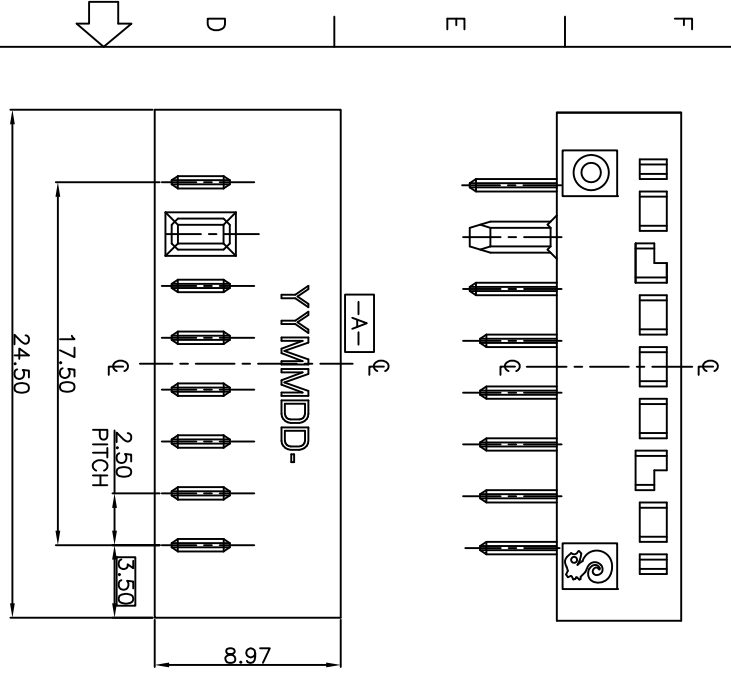


REV/ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO:100603-4A	BOYE.QI	2010.08.19

- NOTES:
- ELECTRICAL PERFORMANCES:
 - CONTACT RESISTANCE: 20 mΩ MAX.
 - INSULATION RESISTANCE: 1000 MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MINUTE.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - PRINTED DATE CODE: "YYMMDD" ON TOP OF CONNECTOR.

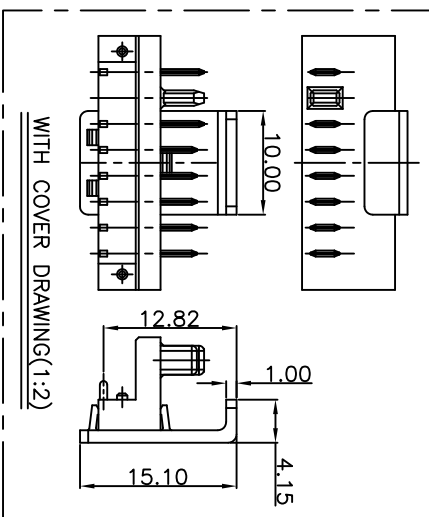

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCE ±0.05mm(T=1.10mm)

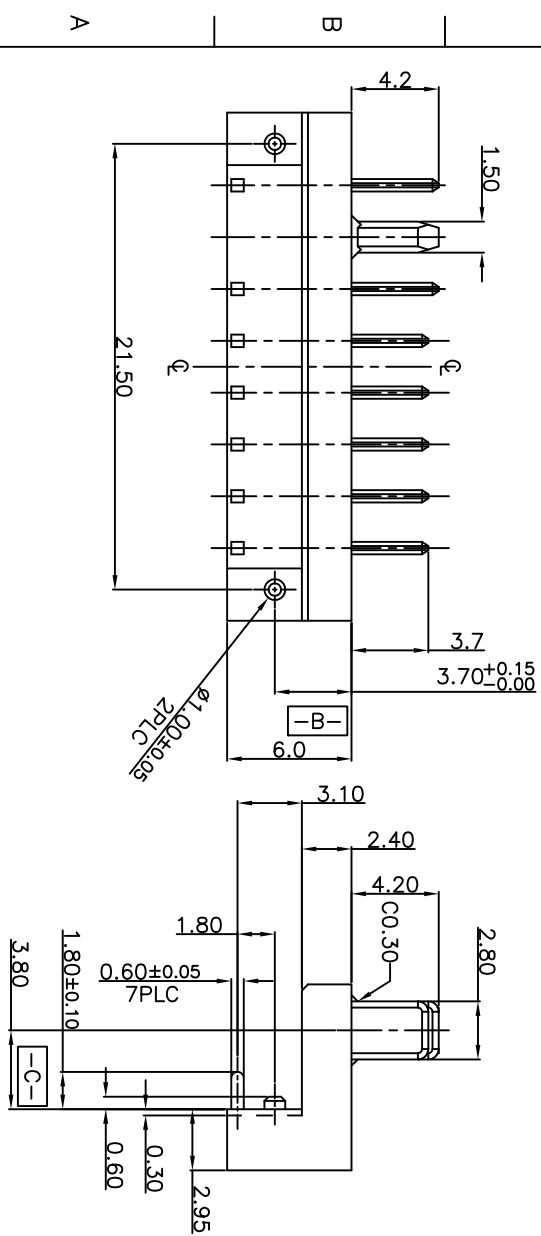

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
B	COVER	1	HIGH TEMPERATURE THERMOPLASTIC,UL 94V-0	BLACK
A	INSERT-MOLDING (BODY+TERMINAL)	7	BRASS,T=0.60±0.02 HIGH TEMPERATURE THERMOPLASTIC,UL 94V-0	Au 10u" in the contact area. Sn plating in the solder tail area. Ni underplating over all.

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.25 X :±.2°
XX :±0.15 XX :±.1°
XXX :±0.10

APVD	DATE	SCALE	SHEET
10/20/08/19	2010.08.19	5:1	1 OF 1

BATTERY CONN. MALE, DIP

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

CUSTOMER COPY