
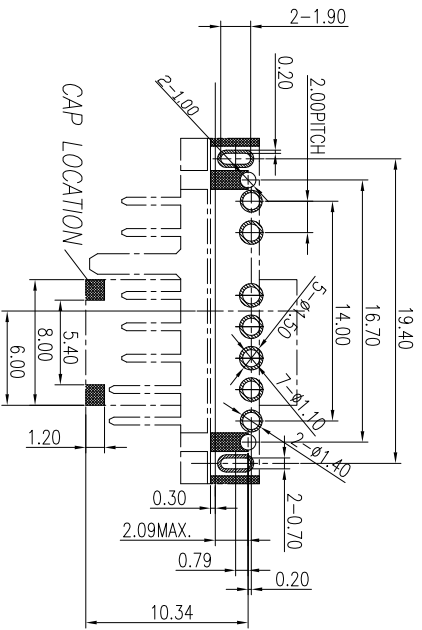
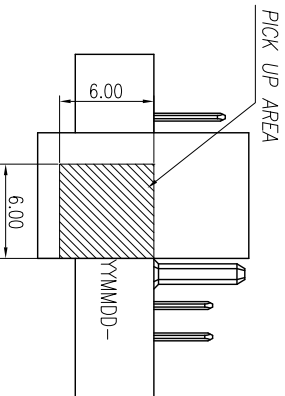
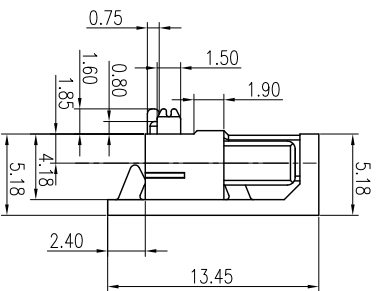


- NOTES:
- ELECTRICAL PERFORMANCES:
 - CONTACT RESISTANCE: 20 mΩ MAX.
 - INSULATION RESISTANCE: 1000 MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR 1 MINUTE.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: ©
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: ©
 - PRINTED DATE CODE "YMMDD" ON TOP OF CONNECTOR.

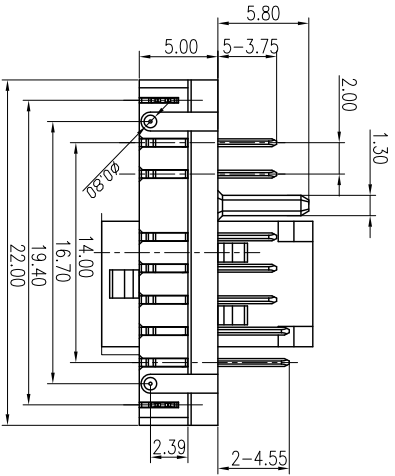

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCE ±0.15mm(T=1.00mm)

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:1131009-6A	Springwu	2014.6.12

E	CAP	1	HIGH TEMPERATURE THERMOPLASTICUL 94V-0	BLACK
D	FORK	2	STAINLESS	MATTE SN 120u"
C	TERMINAL-S	5	BRASS, T=0.50±0.02	GOLD FLASH ON CONTACT AREA; MATTE SN 120u" PLATING ON SOLDER TAIL.
B	TERMINAL-L	2	BRASS, T=0.50±0.02	ALL OVER IN 50u" MIN.
A	BODY	1	HIGH TEMPERATURE THERMOPLASTICUL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singaton Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE DC POWER JACK				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1'	
X.XX	:±0.2			
DWN	Springwu	PART NO.	2BA3015-607111F	
CHKD	Sky	SCALE	1:1 UNIT: mm	
APVD	Lussen	SIZE:	A3	SHEET: 10F1 REV:A
CUSTOMER COPY				