


NOTES

- MECHANICAL CHARACTERISTIC:  
Durability: 5,000 Cycles.
- PLATING:  
Contact RESISTANCE: 30m Ohm Max.  
Insulation Resistance: 1000M Ohm Min.  
Dielectric Withstanding Voltage: 500V AC Min.
- TEMPERATURE:  
Operating Temperature: -40°C ~ +85°C  
Storage Temperature: -40°C ~ +85°C
- PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.
- HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.

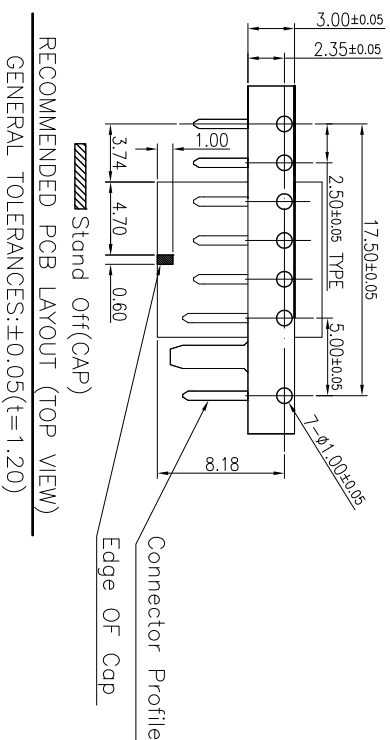

C	TERMINAL	7	COPPER ALLOY	CONTACT AREA : GOLD 4U" MIN
B	COVER	1	THERMOPLASTIC	UL 94V-0 & BLACK
A	HOUSING	1	THERMOPLASTIC	UL 94V-0 & BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singtron Enterprise Co., Ltd. 信晉企業股份有限公司				
TITLE Battery Plug 7pin DIP Type Pitch:2.5				
DWG ANNE PART NO. 2BA3T18-009411F				
CHKD BOYE SCALE: 2:1 UNIT: mm				
APVD BOYE SIZE: A3 SHEET: 1 OF 1 REV: A				

DECIMALS:	ANGLES:
X :±0.5	X :±2°
XX :±0.3	XX :±1°
XXX :±0.2	

CUSTOMER COPY