

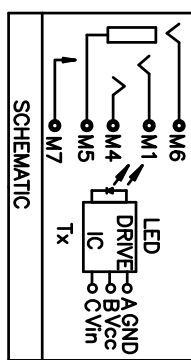
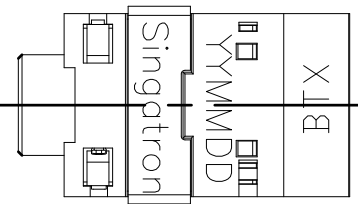
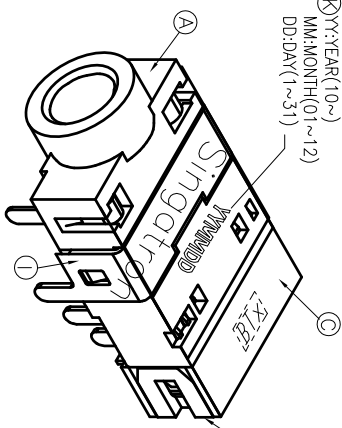
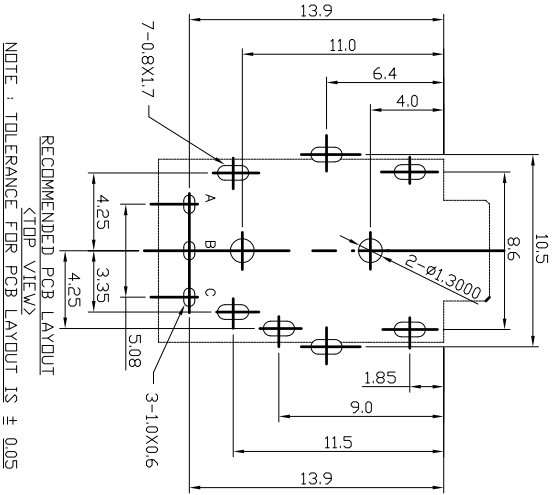
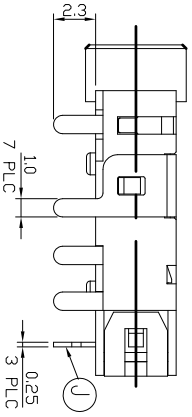


Ⓚ: YEAR(10~)
MM: MONTH(01~12)
DD: DAY(1~31)




- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 12V 1A
 - CONTACT RESISTANCE: 30m MAX(BEFORE).
 - DIELECTRIC VOLTAGE WITHSTAND: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTED FORCE : 3.5 KGS MAX.
 - WITHDRAWAL FORCE : 0.3~4.0 KGS
 - LIFE TEST: 5,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "2SJ373-0010A1 & 2SJ-A373-001 SPEC".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
 - FOR LEAD-FREE PROCESS.
 - PACKAGE : SEE "2SJ-A373-001" PACKAGE.

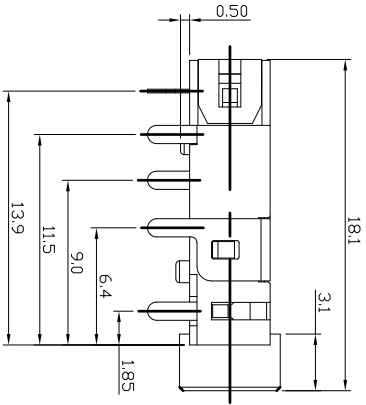

RECOMMENDED PCB LAYOUT
TOP VIEW

NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05

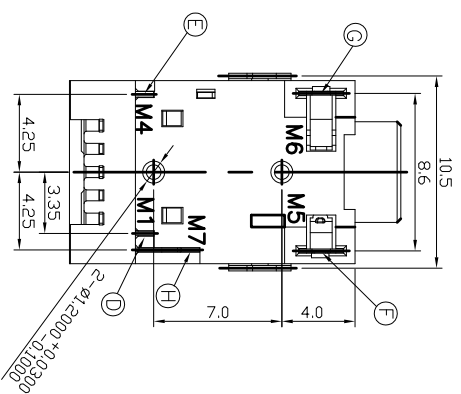

K	INK		BLACK COLOR
J	IC DRIVE	1	EPOLY
I	SHIELDING	1	BRASS 0.3t
H	EARTH TERMINAL	1	COPPER ALLOR
G	EARTH SPRING-B	1	COPPER ALLOR
F	EARTH SPRING-A	1	COPPER ALLOR
E	TIP SPRING	1	COPPER ALLOR
D	RING SPRING	1	COPPER ALLOR
C	CASE	1	HIGH TEMP. THERMOPLSTIC UL 94V-0
B	COVER	1	HIGH TEMP. THERMOPLSTIC UL 94V-0
A	HOUSING	1	HIGH TEMP. THERMOPLSTIC UL 94V-0
NO	DESCRIPTION	QTY	MATERIAL
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS: ANGLES:			
X	:±0.5	X	:±2°
X.X	:±0.3	X.X	:±0.1°
X.XX	:±0.2		
TITLE: 3.5φ PHONE JACK (WITH IC)			
DWN: W-C 20100820 PART NO. 2SJ-A373-001			
CHKD: JMD-1 20100820 SCALE: N/A UNIT: mm			
APVD: JMD-1 20100820 SIZE: A3 SHEET: 1 OF 1 REV: X			
CUSTOMER COPY			

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
V	ECN NO: L080132	BONNIE	2008.12.15	
W	ECN NO: L0900044	AMYC	2009.07.22	
X	ECN NO: L1000065	IVY-C	2010.08.20	