









SPECIFICATIONS:

- 1. ELECTRICAL CHARACTERISTICS:**
 1-1. RATING: 12V 1A
 1-2. CONTACT RESISTANCE: 30mΩ MAX (BEFORE)
 1-3. DIELECTRIC VOLTAGE WITHSTAND: 500V AC FOR ONE MINUTE
 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
- 2. MECHANICAL CHARACTERISTICS:**
 2-1. INSERTED FORCE : 3.5 KGS MAX.
 2-2. WITHDRAWAL FORCE : 0.3~4.0 KGS




3. LIFE TEST: 5,000 CYCLES MIN.

4. PACKING: TAPE & REEL
 5. TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
 6. GREEN PRODUCT IDENTIFICATION MARK IN JACK:
 7. GREEN PRODUCT IDENTIFICATION LABEL IN PACKING:
 8. FOR LEAD-FREE PROCESS.

G.P. PASS

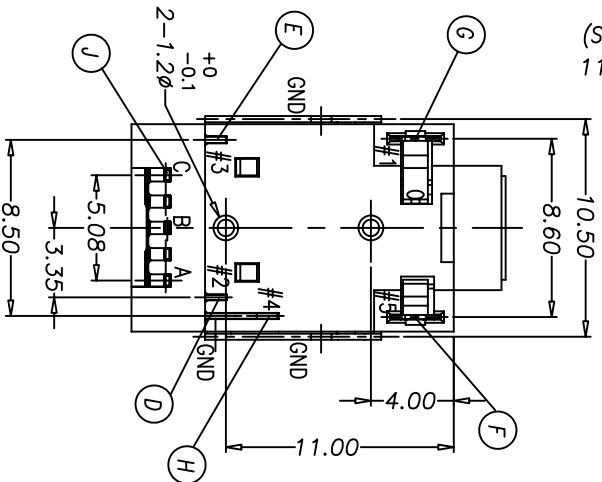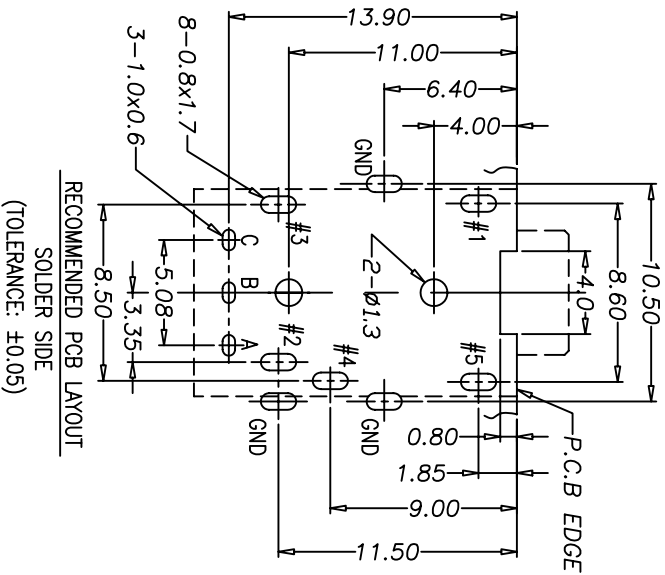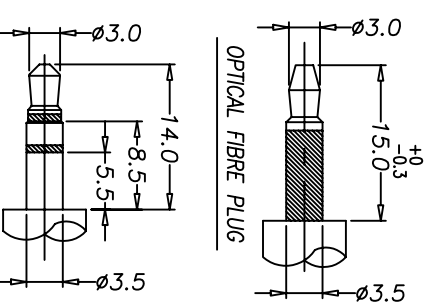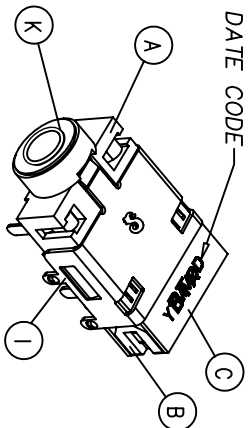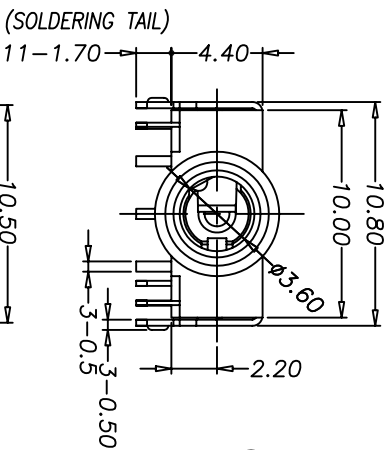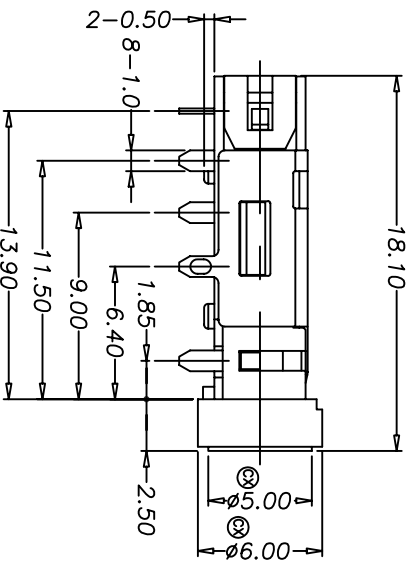

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PRODUCT	RELEASE	JACKY	2007.03.09
B	ECN NO.1070223		BERRY1	2007.7.31



K	METAL	1	BRASS	NICKEL PLATING
J	IC DRIVE	1	EPOXY	TIN PLATING (Lead-Free)
I	SHIELDING	1	BRASS	NICKEL PLATING
H	EARTH SPRING-A	1	PHOSPHOR BRONZE	GOLD FLASH
G	EARTH SPRING-B	1	PHOSPHOR BRONZE	GOLD FLASH
F	EARTH TERMINAL	1	PHOSPHOR BRONZE	GOLD FLASH
E	TIP SPRING	1	PHOSPHOR BRONZE	GOLD FLASH
D	RING SPRING	1	PHOSPHOR BRONZE	GOLD FLASH
C	CASE	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
B	COVER	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
 信安企業股份有限公司

DECIMALS: ANGLES:
 X :±0.5 X :±2
 X.X :±0.3 X.X :±1
 X.XX :±0.2

TITLE: Ø3.5 PHONE JACK (WITH IC)
 DWG: 2007.03.21 PART NO. 2SI-C373-B01
 CHKD: 2007.01.11 SCALE: 4/1 UNIT: mm
 APVD: 2007.01.11 SIZE: A3 SHEET: 1 OF 1 REV: B
 CUSTOMER COPY