

RoHS Compliance

NOTE:





CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-GRAY.
- 1.2 INSERT HOUSING: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-GRAY.
- 1.3 CONTACTS: PHOSPHOR BRONZE.

2. FINISH:


- 2.1 CONTACTS: GOLD PLATED ON ENTIRE CONTACT, 1.27 μ m [50 μ "] MIN. NICKEL UNDERPLATED OVERALL.

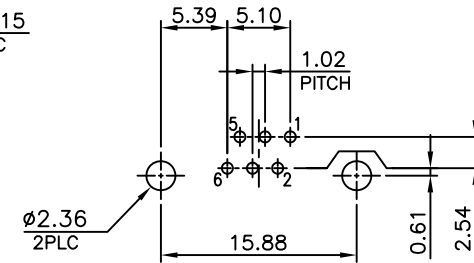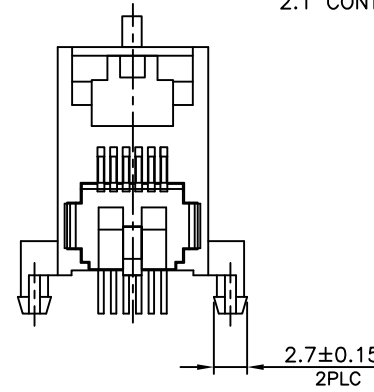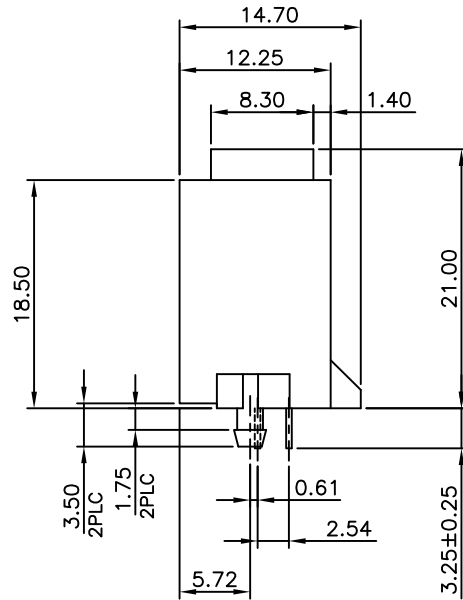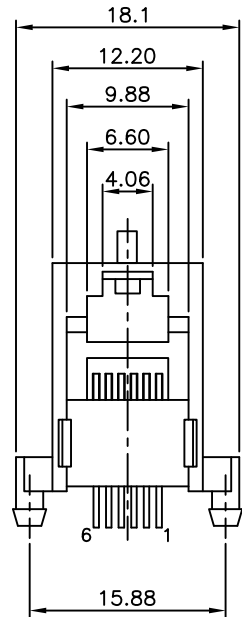

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 mm (TOP VIEW)

P/N: 3004-6XX-11

No. of Contact	GOLD PLATED
2	1: 6u"
4	2: 15u"
6	3: 30u"
	4: 50u"



TOLERANCES UNLESS OTHERWISE SPECIFIED:					Singatron Enterprise Co., Ltd.					
X	±	-	TITLE		6POSITION,PCB SCOKET					
X.X	±	0.25	DWN	JUL-04-2019	PART NO. 3004-6XX-11					
X.XX	±	0.13	CHKD	A.HUANG	SCALE 1:1	UNIT: mm				
X.XXX	±	0.05	APVD	M.CHANG	SIZE: A3	SHEET: 1 OF 1	REV: 1			
ANGLES	±	-	CUSTOMER COPY							