

Side Entry Modular Telephone Jack


(Low Profile, Shielded, Single Port)

3012S Series

Material and Finish:

- * Housing: PBT Polyester UL94V-0 mixed Glass Fiber.
Standard Color: Black.
- * Contact: 0.35mm Thickness Phosphor Bronze.
Plated with Hard Gold and Gold Flash in Solder Area.
- * Shielded: 0.25mm Thickness Copper Alloy,
Plated with Nickel.
- * Cavity confirms to FCC rules and regulations part 68,
subpart F.
- * RoHS compliant.

P.C.B. Hole Layout

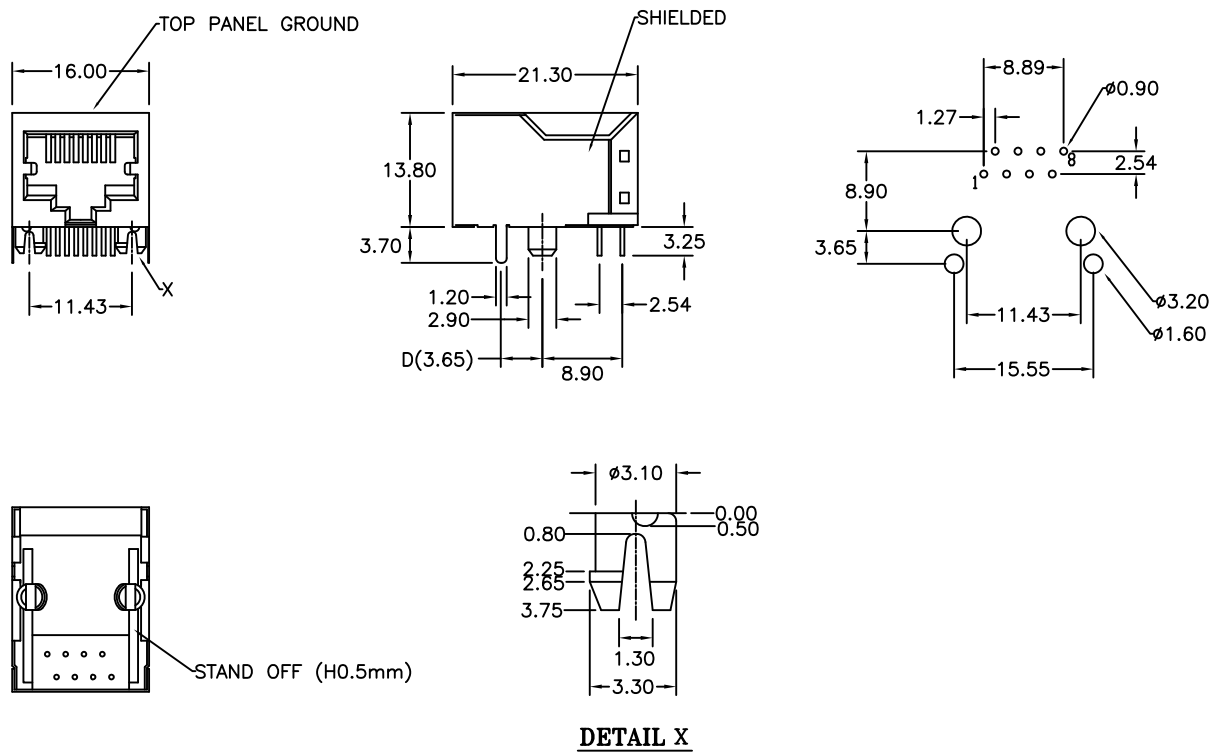

Ordering Information

Series No.	No. of Position	No. of Contact	No. of Port	Contact Plating	Shielded Pins Type
3012S	8	8	01	1	2 - F
	8	2	1 Port	6 μ "	D Dimension Flat Contacts
		4		15 μ "	3.65mm
		6		30 μ "	
		8		50 μ "	