

45° PCB Modular Telephone Jack






3030 Series

Material and Finish:




- * Housing: Engineering Thermoplastic Flammability Rating UL 94V-0.
Standard Color : White.
- * Contact: 0.35mm Thickness Flat Phosphor Bronze.
Gold Plating over Nickel in Contact.
Tin Plating over Nickel in Solder Area.
- * Shielded: Brass with Nickel Plated.
- * Cavity confirms to FCC rules and regulations part 68, subpart F.
- * RoHS compliant.

w/o shielded

with shielded

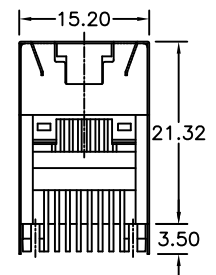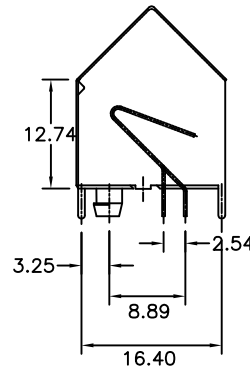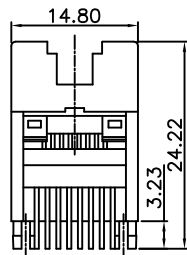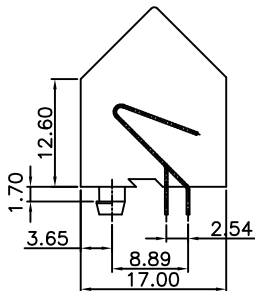

P.C.B. Hole Layout

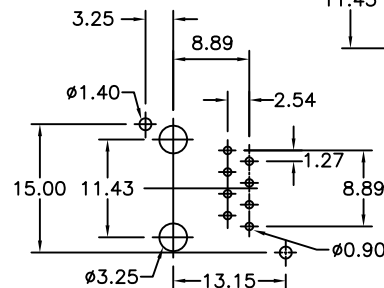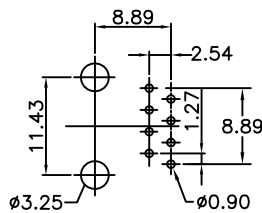

Ordering Information

Series No.	No. of Position	No. of Contact	Keyed	Contact Plating
3030	8	8	2	1
Unshielded 3030	8	2	w/o key 2	6 μ" 1
Shielded 3030S		4		15 μ" 2
		6		30 μ" 3
		8		50 μ" 4