


# Top Entry SMT Type Modular Telephone Jack

(w/o Board Lock) 3738 Series

## Material and Finish:

- \* Housing: DSM Stanyl TE250F6 (Nylon-46) Heat Deflection Temp.290° UL 94V-0  
Black color
- \* Contact: 0.35mm Thick Phosphor Bronze Plated with Hard Gold  
and Gold Flash in Solder Area.
- \* Hold Down: 0.35mm Thick Copper Alloy, Plated with Tin.
- \* Cavity Confirms to FCC Rules and Regulations Part 68, Subpart F.
- \* RoHS compliant.

## P.C.B. Hole Layout

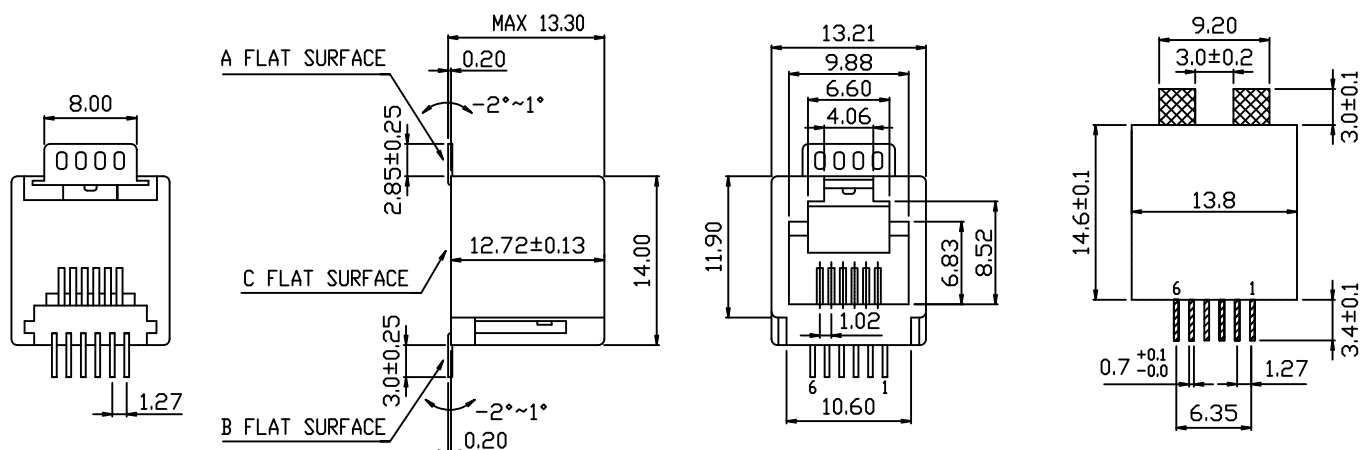

### NOTE:

1. A AND B HIGHEST POINT  
MUST OVER C FLAT SURFACE.
2. THE MAXIMUM DISTANCE (<0.15m/m)<br>BETWEEN LOWEST AND HIGHEST  
ON A AND B FLAT SURFACE.

## Ordering Information

Series No.	No. of Position	No. of Contact	Keyed	Contact Plating
3738	6	4	2	1
	6	2	w/o Key 2	6 μ" 1
		4		15 μ" 2
		6		30 μ" 3
				50 μ" 4
				F μ" 0