


Top Entry SMT Type Modular Telephone Jack

(w/o Board Lock) 3738 Series

Material and Finish:

- * Housing: DSM Stanyl TE250F6 (Nylon-46) Heat Deflection Temp.290° UL 94V-0
Black color
- * Contact: 0.35mm Thick Phosphor Bronze Plated with Hard Gold
and Gold Flash in Solder Area.
- * Hold Down: 0.35mm Thick Copper Alloy, Plated with Tin.
- * Cavity Confirms to FCC Rules and Regulations Part 68, Subpart F.
- * RoHS compliant.

P.C.B. Hole Layout

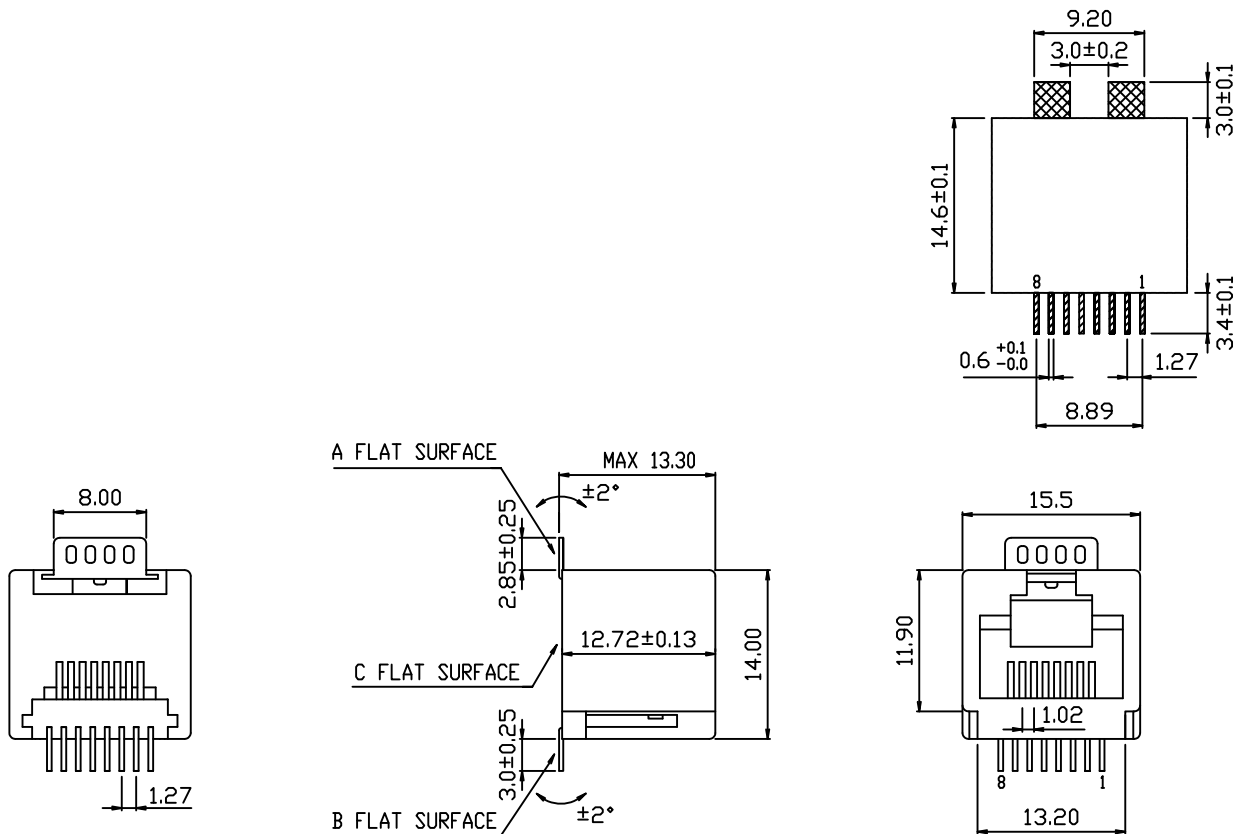

Ordering Information

Series No.	No. of Position	No. of Contact	Keyed	Contact Plating
3738	8	8	2	1
	8	2	w/o Key 2	6 μ" 1
		4		15 μ" 2
		6		30 μ" 3
		8		50 μ" 4
				F μ" 0