


Top Entry SMT Type Modular Jack

(w/o Keyed)

3739IM Series

Material and Finish:

- * Housing: DSM STANYL TE250F6 (NYLON-46)
Heat Deflection Temp.290°
Black color, UL 94V-0
- * Contact: 0.35mm Thickness Phosphor Bronze
Plated with Hard Gold and
Gold Flash in Solder Area.
- * Hold Down: 0.40mm Thickness Copper Alloy.
Plated with Tin.
- * Cavity confirms to FCC rules and regulations part 68,
subpart F.
- * RoHS compliant.

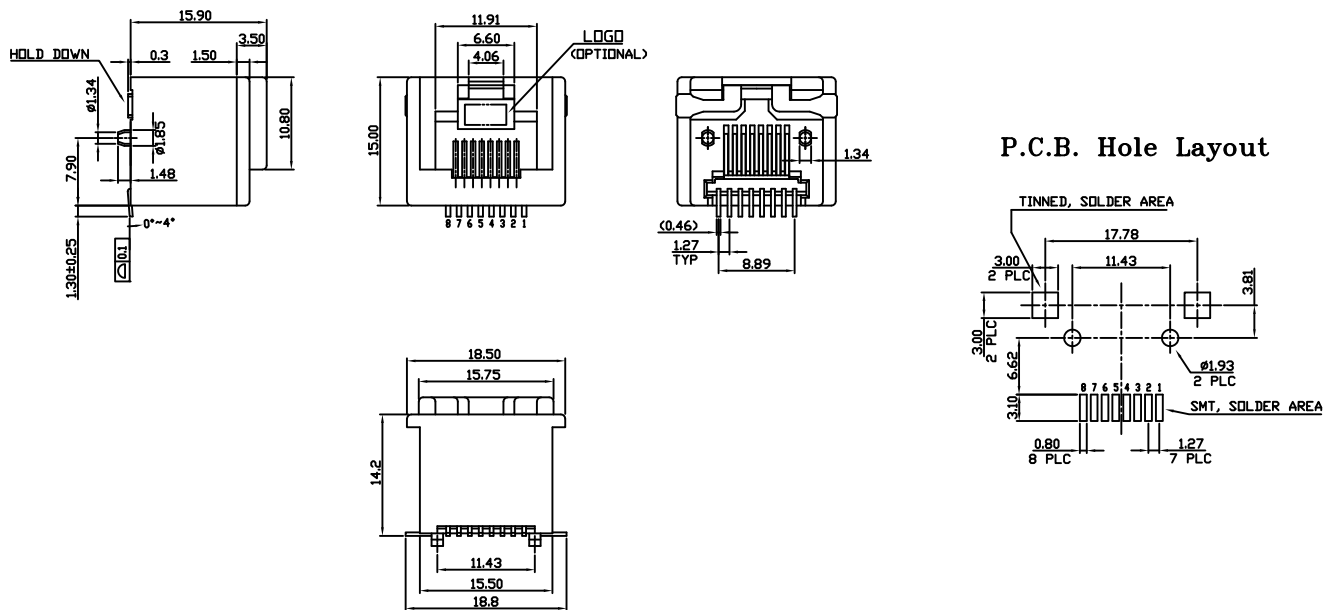

Ordering Information

| Series No. | No. of Position | No. of Contact | Keyed | Contact Plating |
|------------|-----------------|----------------|-----------|-----------------|
| 3739IM | 8 | 8 | 2 | 1 |
| | 8 | 2 | w/o key 2 | 6 μ" 1 |
| | | 4 | | 15 μ" 2 |
| | | 6 | | 30 μ" 3 |
| | | 8 | | 50 μ" 4 |
| | | | | F μ" 0 |