


# Side Entry SMT Type Modular Telephone Jack (Low Profile) 3756 Series

## Material and Finish:

- \* Housing: PA9T GN2330 Heat Resistant Polyamide Resin  
Black color, UL94V-0
- \* Insert Housing: DSM Stanyl TE250F6 (Nylon-46) Heat Deflection Temp.290°  
Black color, UL94V-0
- \* Contact: 0.35mm Thick Phosphor Bronze Plated with Hard Gold  
and Gold Flash in Solder Area.
- \* Shield: 0.25mm Thick Copper Alloy, Plated with Nickel.
- \* RoHS compliant.

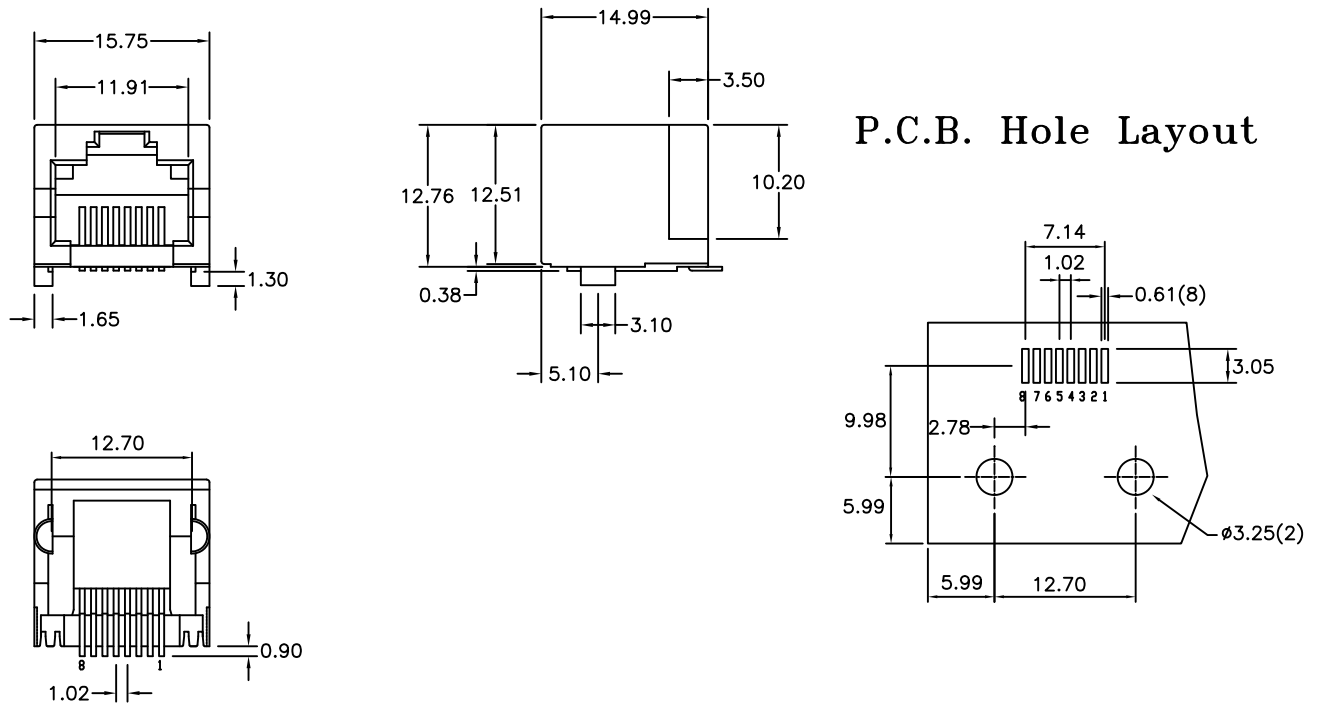

## Ordering Information

Series No.	No. of Position	No. of Contact	Keyed	Contact Plating
3756	8	8	2	1
	8	2	w/o Key 2	6 $\mu$ " 1
		4		15 $\mu$ " 2
		6		30 $\mu$ " 3
		8		50 $\mu$ " 4