Side Entry SMT Type Modular Telephone Jack

(Very Low Profile) *3778 Series*

Material and Finish:

* Housing: DSM Stanyl TE250F6 (Nylon–46) Heat Deflection Temp.290° Black color, UL94V–0
* Contact: 0.35mm Thick Phosphor Bronze Plated with Hard Gold and Gold Flash in Solder Area.
* Hold Down: 0.30mm Thick Copper Alloy, Plated with Tin.
* RoHS compliant.

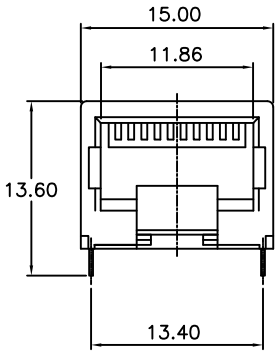

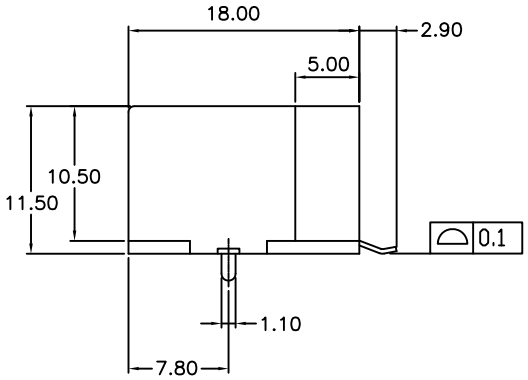

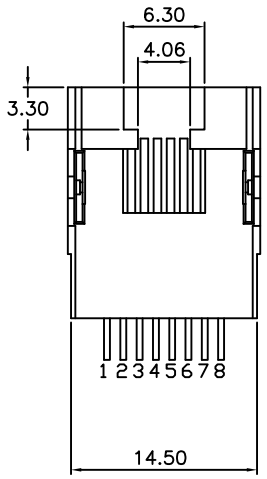

P.C.B. Hole Layout

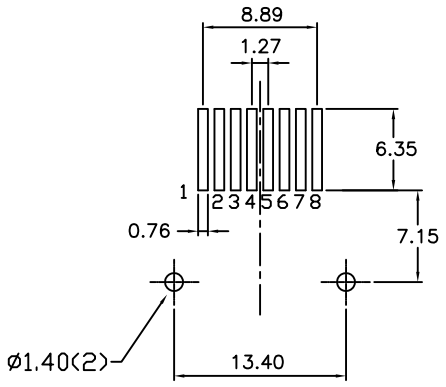

Ordering Information

Series No.		No. of Position	No. of Contact	Keyed	Contact Plating
3778	–	8	8	2	1
		8	2	w/o Key 2	6μ" 1
			4		15μ" 2
			6		30μ" 3
			8		50μ" 4

SINGATRON U.S.A. Tel: (909)464–1883 Fax: (909)464–1884 Email: sales@singatron.com