
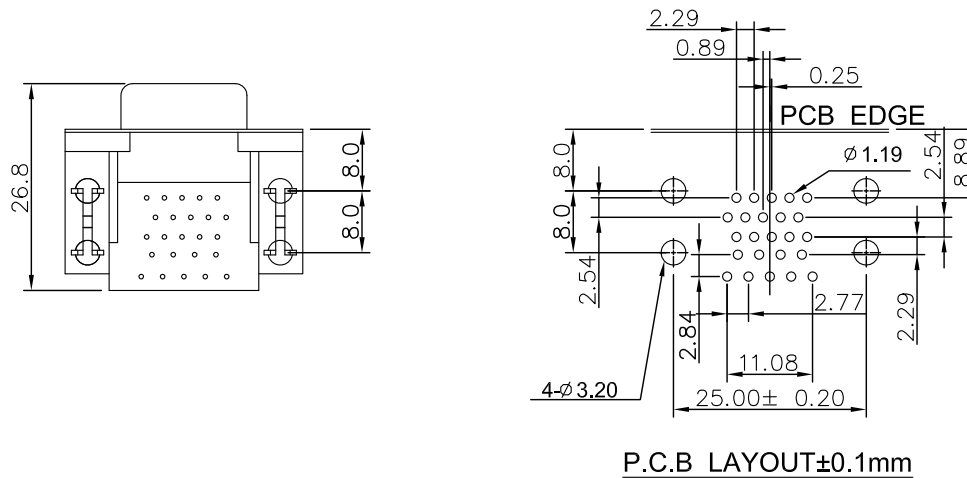


REV.	ECN.	DATE	DWN	APVD
A.1	ECN-070321-01	05/13/08	MANDY	HENRY

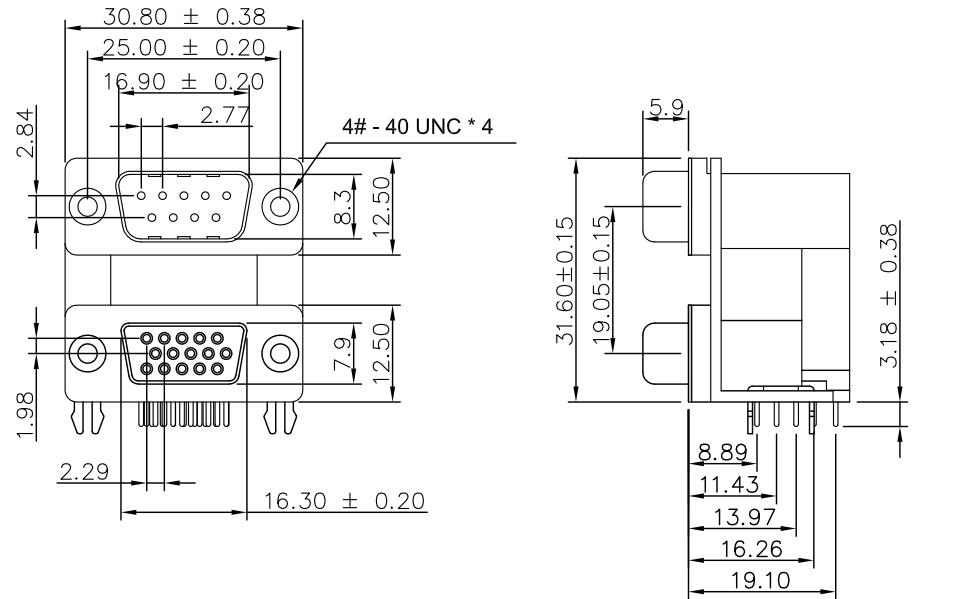

MATERIAL:

INSULATOR : THERMOPLASTIC ,UL 94V-0.
 STANDARD : PBT. Δ
 CONTACT : COPPER ALLOY.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL : STEEL.
 BOARDLOCK : BRASS,TIN PLATED.
 BRACKET : ZINC ALLOY,NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 2 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.
 CONTACT RESISTANCE : 15m Ω MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

DP4 - E09P / E15SB - ANI - 1B1
 1 2 3 4 5 6 7

- SERIES:
- POSITION: E:9/E:15
- PORT SPACING:
A=19.05mm
- MATING OPTION:
N=4#40 THREAD RIVET W/DAUL BOARDLOCK 8.0/8.0mm
NI=BOARDLOCK AND IRON JACK SCREWS (706-440I) ASSEMBLED
N/I=BOARDLOCK AND IRON JACK SCREWS (706-440I) UNASSEMBLED
- CONTACT PLATING:
1=SELECTIVE GOLD FLASH
- INSULATOR COLOR:
B=BLACK/BLUE
- SHELL PLATING:
1=NICKEL

SINGATRON U.S.A.

GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05
 ANGLE TOLERANCE $\pm 1^\circ$
 RADIUS ± 0.25
 HOLE ± 0.13


DRAWN. TRACY
 CHECKED. HENRY
 APPROVED. HENRY

DATE 03 - 02 - 2012
 DATE 03 - 02 - 2012
 DATE 03 - 02 - 2012

DRAWING NO. C-DD0024
 TITLE. D-SUB CONN. DUAL PORT RIGHT ANGLE , 9 MALE TO H-D 8.89mm 15 FEMALE
 PART NO. DP4-E09P/E15SB-ANI-1B1
 CUSTOMER DRAWING
 REV A.1

SIZE A4
 UNIT mm
 SCALE. 1 : 1
 SHEET. 1 OF 1

REV.	ECN.	DATE	DWN	APVD

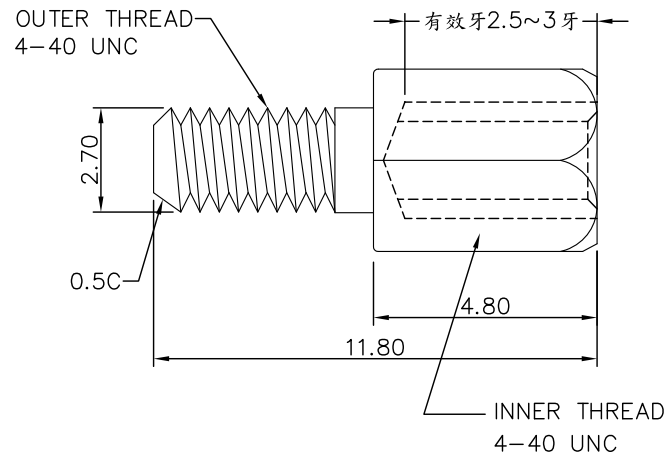

MATERIAL : SPCC.
 FINISH : NICKEL OVER ZINC PLATED.
 TORSION : 6 kgf* cm.

SINGATRON U.S.A.

GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05
 ANGLE TOLERANCE ± 1°
 RADIUS ± 0.25
 HOLE ± 0.13

DRAWN. MANDY
 DATE NOV - 03 - 2011
 CHECKED.
 DATE
 APPROVED.
 DATE

DRAWING NO. 3-DB91-HXXX1X-R

PRODUCT DRAWING

TITLE. HEXAGONAL SCREW

PART NO. 706-440I

REV X.0

SIZE A4	UNIT mm	SCALE. 5 : 1	SHEET. 1 OF 1	
------------	------------	-----------------	------------------	--