
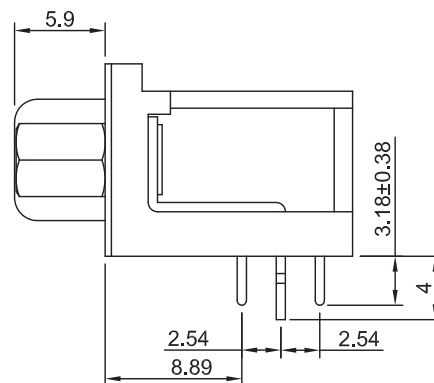


REV.	ECN.	DATE	DWN	APVD
A.1	ECN-070321-01	03/28/07	TRACY	HENRY
A.2	ECN-071119-01	11/19/07	TRACY	HENRY
A.3	ECN-090306-01	03/11/09	MANDY	HENRY


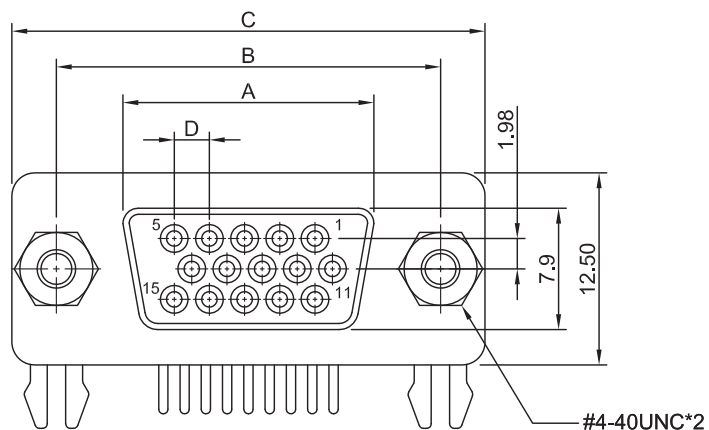


MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0. 
 STANDARD : PBT, BLUE
 CONTACT : COPPER ALLOY.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL : STEEL, NICKEL PLATED.
 BOARDLOCK : STEEL, TIN PLATED. 
 RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 2 AMP
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
 CONTACT RESISTANCE : 15mΩ MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C.

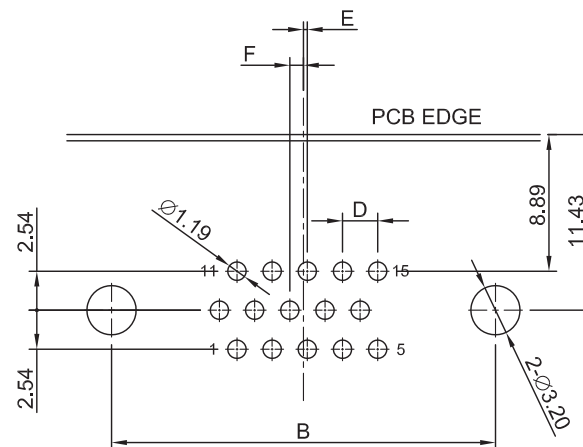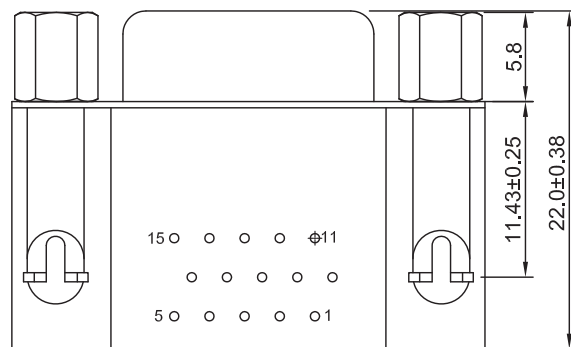

POSITION	A±0.20	B±0.20	C±0.38	D	E	F
15 PIN	16.30	25.00	30.80	2.29	0.25	0.89

RoHS COMPLIANT

SINGATRON U. S. A.

GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05
 ANGLE TOLERANCE ± 1°
 RADIUS ± 0.25
 HOLE ± 0.13

DRAWN. MANDY
 CHECKED.
 APPROVED.

DATE 08 - 09 - 2017
 DATE
 DATE

DRAWING NO. CUSTOMER DRAWING
 TITLE. HIGH DENSITY D-SUB CONN. RIGHT ANGLE
 FEMALE FOOTPRINT : 8.89mm
 PART NO. DRH-E15SB-NJ-090-LF REV A.3

SIZE A4 UNIT mm SCALE 2:1 SHEET 1 OF 1 