

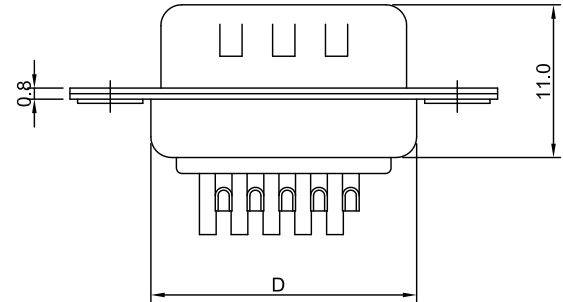


RoHS Compliant

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-080117-01	02/20/08	TRACY	HENRY

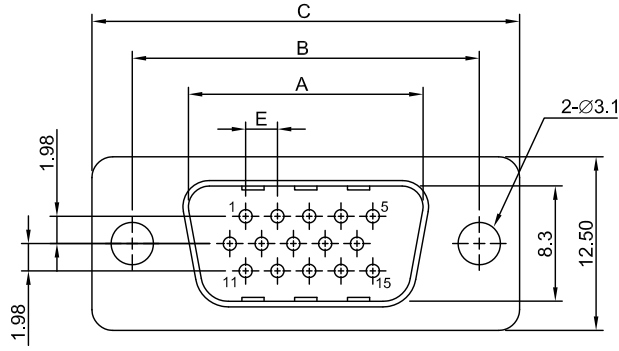

POSITION	A±0.20	B±0.20	C±0.38	D±0.20	E
15PIN	16.90	25.00	30.80	19.15	2.29
26PIN	25.25	33.30	39.20	27.60	2.29
44PIN	38.95	47.05	53.05	41.10	2.29
62PIN	55.40	63.50	69.40	57.40	2.41

MATERIAL:

INSULATOR:PBT, UL 94V-0.
 CONTACT:COPPER ALLOY.
 CONTACT FINISH:GOLD OVER NICKEL.
 SHELL:STEEL, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 2AMP.
 DIELECTRIC WITHSTANDING VOLTAGE:1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE:1000MΩ MIN. AT 500V DC.
 CONTACT RESISTANCE:15mΩ MAX.
 OPERATING TEMPERATURE:-55°C ~ +105°C.

ORDER INFORMATION :

DSH - E 15 P - X - 0 0 1 W
 1 2 3 4 5 6 7

- SERIES
- POSITION
E=15 A=26 B=44 C=62
- POLARITY
P=MALE
- MOUNTING OPTIONS
K=RIVETED REAR #4-40 NUTS
SEE MOUNTING OPTION SHEET FOR OTHERS MOUNTING
- CONTACT PLATING
0=FULL GOLD FLASH
4=SELECTIVE 15u" GOLD
6=SELECTIVE 30u" GOLD
- INSULATOR COLOR
0=BLACK
1=WHITE
2=BLUE
- SHELL PLATING
1=NICKEL

GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05
 ANGLE TOLERANCE ± 1°
 RADIUS ± 0.25
 HOLE ± 0.13

Singatron Enterprise Co., Ltd.				
TITLE	HIGH DENSITY D-SUB SOLDER TYPE STAMPED CONTACTS MALE			
DWN	JEAN	PART NO. DSH-XXP-X-XX1W		
CHKD	11-24-2005	SCALE 1:1	UNIT: mm	⊕ ↺
APVD	HENRY	SIZE: A3	SHEET: 1 OF 1	REV: A.1
CUSTOMER COPY				