
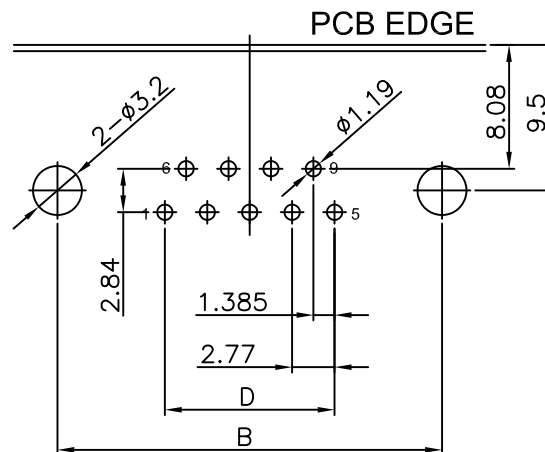
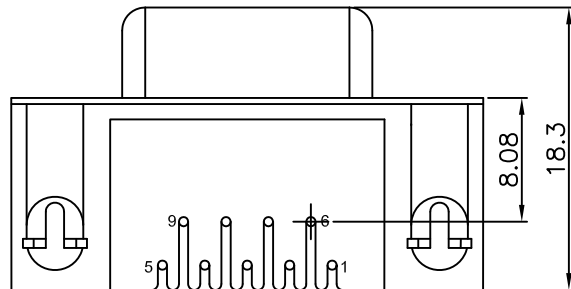
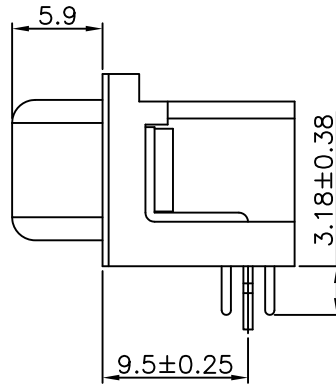


REV.	ECN.	DATE	DWN	APVD

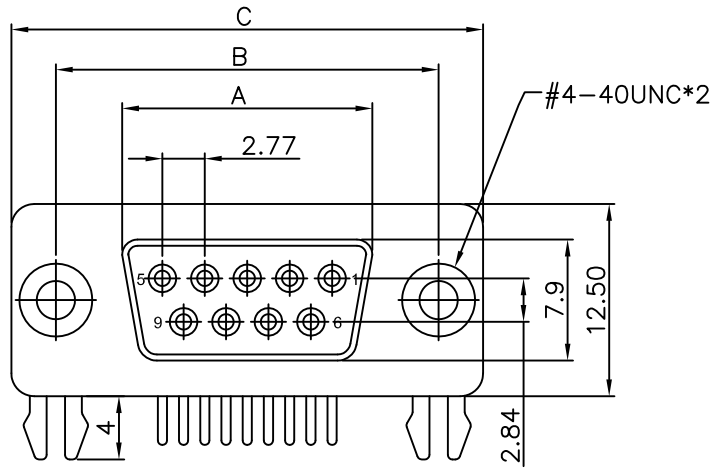

MATERIAL:

INSULATOR : NYLON 9T, UL 94V-0
 CONTACT : COPPER ALLOY
 CONTACT FINISH : GOLD OVER NICKEL
 SHELL : STEEL ,NICKEL PLATED
 BOARDLOCK : BRASS,TIN PLATED
 RIVETED INSERT : BRASS,NICKEL PLATED

SPECIFICATION:

CURRENT RATING : 5 AMP
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
 CONTACT RESISTANCE : 15mΩ MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C.

Order Information :

DR - E 9 S B - N - 0 0 1 - HT
 1 2 3 4 5 6 7

1. SERIES NUMBER	DR : D-SUB RIGHT ANGLE 8.08mm MOUNT
2. POSITION	E : 9 A : 15 B : 25 C : 37
3. POLARITY	SB : FEMALE
4. MATING AND MOUNTING OPTIONS	N:4-40 THREADED RIVETED W/BOARDLOCK NJ:BOARDLOCK AND JACK SCREWS ASSEMBLED SEE MOUNTING OPTION SHEET FOR OTHERS MOUNTING
5. PLATING	1 : SELECTIVE GOLD 4 : SELECTIVE 15u" GOLD 6 : SELECTIVE 30u" GOLD 0 : FULL GOLD © Standard : 0
6. INSULATOR COLOR	0 : BLACK
7. SHELL PLATING	1 : NICKEL

RoHS COMPLIANT

POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D
9 Pin	16.30	25.00	30.80	11.08
15 Pin	24.60	33.30	39.20	19.39
25 Pin	38.35	47.05	53.05	33.24
37 Pin	54.80	63.50	69.40	49.86

SINGATRON U. S. A.

GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05
 ANGLE TOLERANCE ± 1°
 RADIUS ± 0.25
 HOLE ± 0.13

DRAWN. Peter
 CHECKED. AMY
 APPROVED. HENRY

DATE 04-11-2005

DATE 04-12-2005

DATE 04-14-2005









DRAWING NO. DB93-XX0XXXX00-R W00001

TITLE. D-SUB CONN RIGHT ANGLE ,
FEMALE FOOTPRINT : 8.08mm

PART NO. DR-XXSB-X-XX1-HT REV A.0

SIZE	UNIT	SCALE.	SHEET.	
A4	mm	2 / 1	1 OF 1	

REV.	ECN.	DATE	DWN	APVD

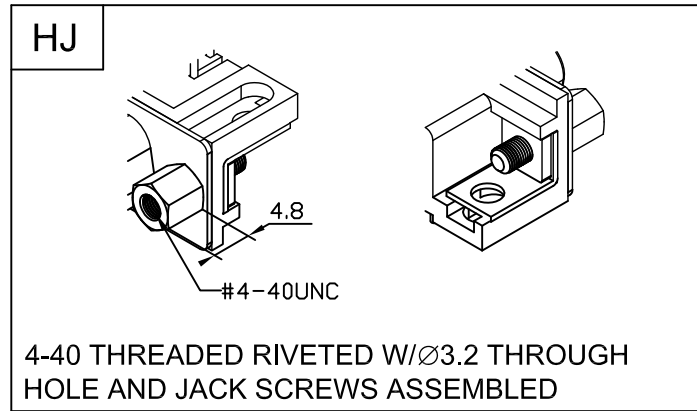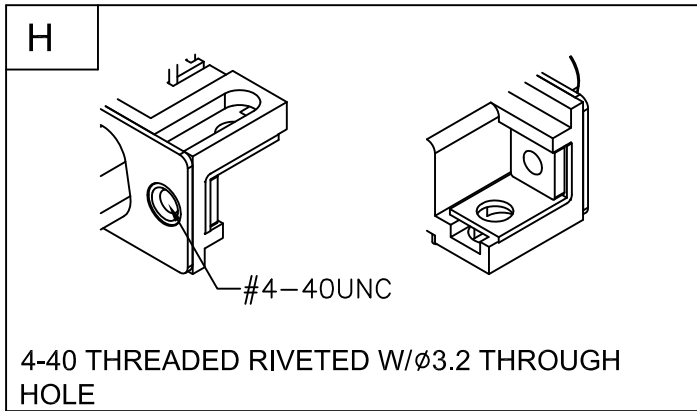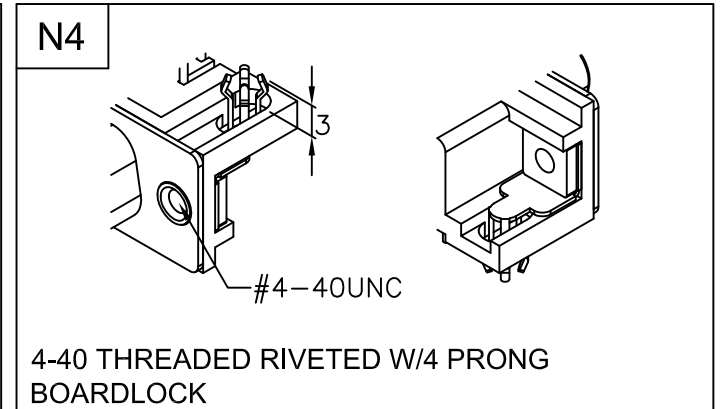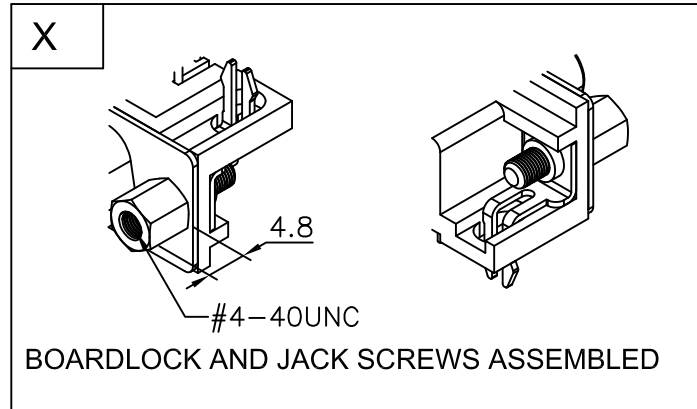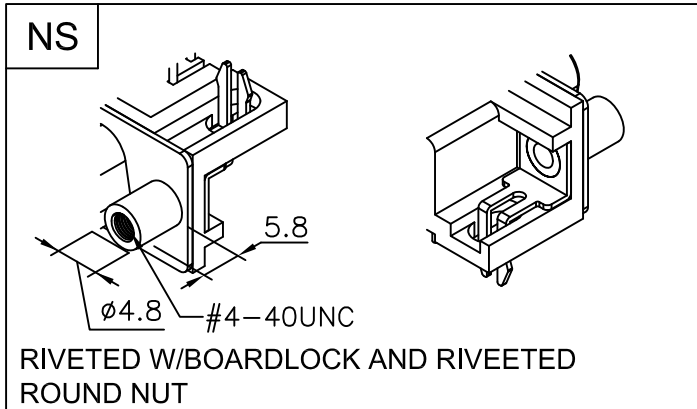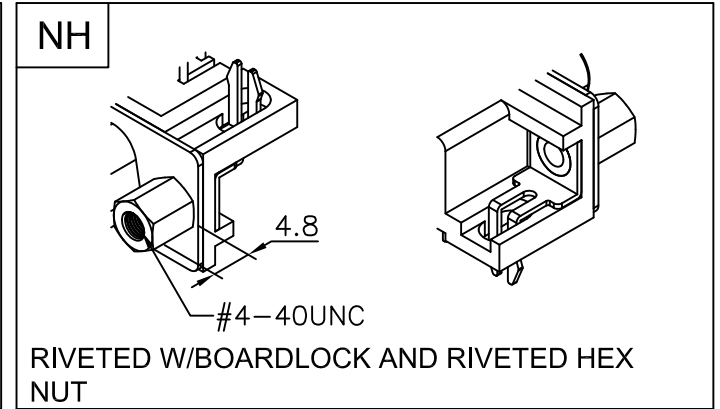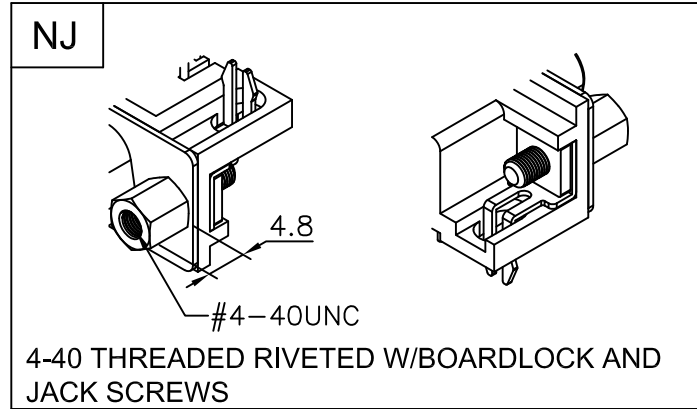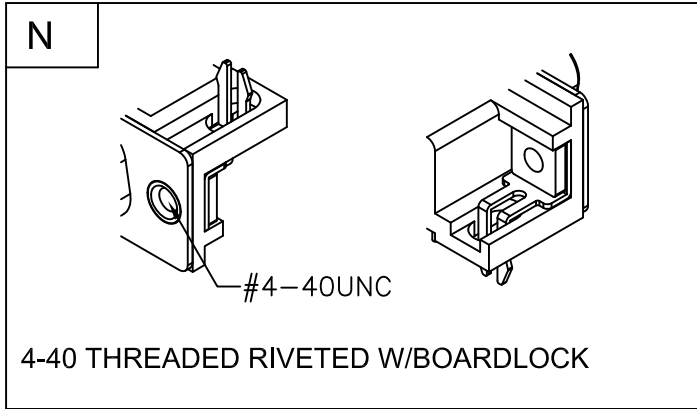

SINGATRON U. S. A.					GENERAL TOLERANCE X.X ±0.25 X.XX ±0.15 X.XXX ±0.05 ANGLE TOLERANCE ± 1° RADIUS ±0.25 HOLE ±0.13	DRAWN. Peter	DATE 11-10-2008	DRAWING NO. DB93_MOUNT	W00001	
SIZEA4 UNITmm SCALE.FREE SHEET.1 OF 1 						CHECKED. Henry	DATE 11-10-2008	TITLE. D-SUB CONN RIGHT ANGLE , FEMALE & MALE FOOTPRINT : 8.08mm		
						APPROVED. 徐龍	DATE 11-10-2008	PART NO. DR-MOUNT	REV	A.0