


RECOMMENDED PCB LAYOUT(TOP VIEW)
(THICKNESS=1.6±0.10mm)
(TOLERANCE=±0.05mm)

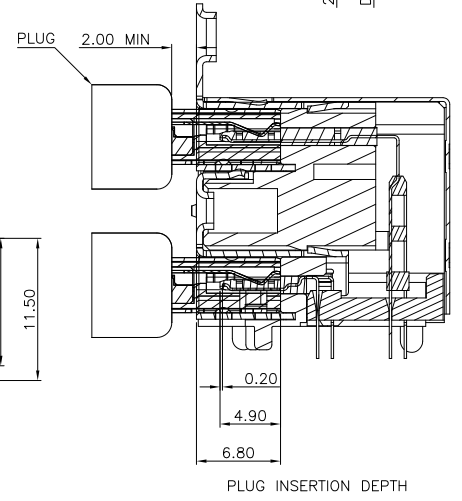

REV.	REVISOR NOTE	DATE
4	MODIFY LAYOUT	2014-09-2
5	MODIFY STAND OFF	2015-07-0

- NOTES:
- MATERIAL:
 - OUT SHELL: SUS430 T=0.30mm
 - LOWER SHELL: SUS304 T=0.5mm
 - UPPER SHELL: SUS304 T=0.5mm
 - HOUSING: LCP+30%GF BLACK UL94V-0
 - LOWER HOUSING: LCP+30%GF BLACK UL94V-0
 - UPPER HOUSING: LCP+30%GF BLACK UL94V-0
 - LOWER TERMINAL: C2680R-H T=0.20mm
 - UPPER TERMINAL: C2680R-H T=0.20mm
 - COVER: LCP E130i+30%GF BLACK UL94V-0
 - PLATING:
 - TERMINAL: GOLD PLATED ON CONTACT AREA, AND MATTE-TIN 60~200u" ON SOLDER AREA
 - SHELL: NICKEL PLATED 50u"MIN.
 - P/N: 2HE76-10A-00X1

DIM A:
0: DIM A 1.6mm
1: DIM A 2.1mm
2: DIM A 2.6mm

GENERAL TOLERANCES
(UNLESS SPECIFIED)

X	± 0.30	X'	± 1'
.X	± 0.20	.X'	± 0.5'
.XX	± 0.10		

Singatron Enterprise Co., Ltd.			
TITLE	DOUBLE HDMI TYPE A FEMALE DIP TYPE		
DWN	PART NO.	2HE76-10A-00X1	
CHKD	SCALE	UNIT:	mm
APVD	SIZE: A3	SHEET: 1 OF 1	REV: 5
CUSTOMER COPY			