


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S150416-15C	Vicky	2015.03.30




FEMALE CONN.  
WATERPROOF RATE: IP67

MALE CONN.  
WATERPROOF RATE: IP67

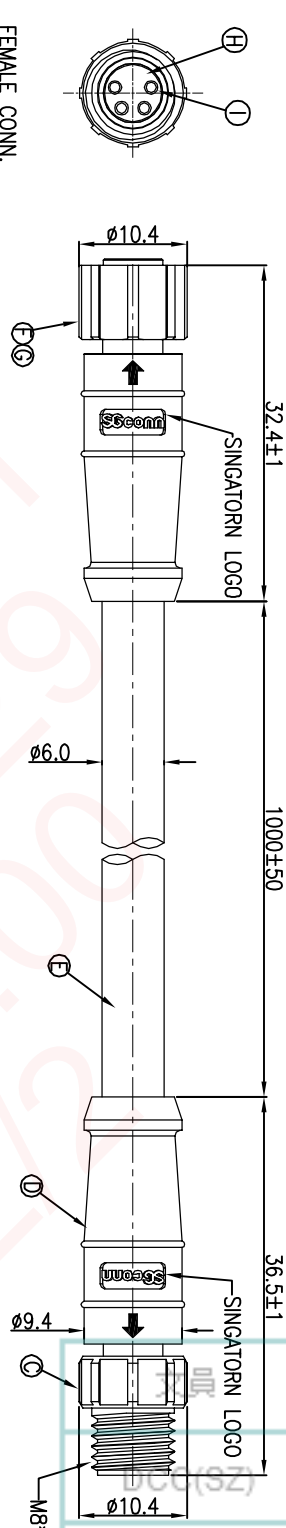

4	WHITE	4
3	BLACK	3
2	BLUE	2
1	BROWN	1
CONN1. WIRE COLOR		CONN2.
PIN OUT		

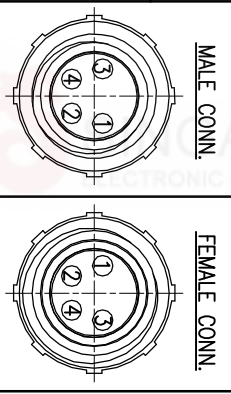

NOTES:

1. WATERPROOF RATE: IP67  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
RATING: 60V AC/DC 5A
3. SPECIFICATIONS: SEE "M8 SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATORN HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

I	FEMALE PIN	4	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
H	BODY	1	TPU	BLACK
G	O-RING	1	VITON	RED
F	FEMALE SCREW NUT	1	NYLON+33%GF	BLACK
E	CABLE	1	UL2464 20#*4C+AL UV OD=φ6.0	BLACK(PVC JACKET)
D	OVER MOLD	2	TPU	BLACK
C	MALE SCREW NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	4	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信譽企業股份有限公司

DECIMALS:	ANGLES:	TITLE	M8 SERIES FEMALE CONN.+MALE CONN. (4PIN)
X :±0.5	X :±2°	DWN	Vicky
X.X :±0.3	X.X :±1°	CHKD	Harden
X.XX :±0.2		APVD	Steve
SCALE 2:1 UNIT: mm			
SIZE: A3 SHEET: 1 OF 1 REV: A			

CUSTOMER COPY