

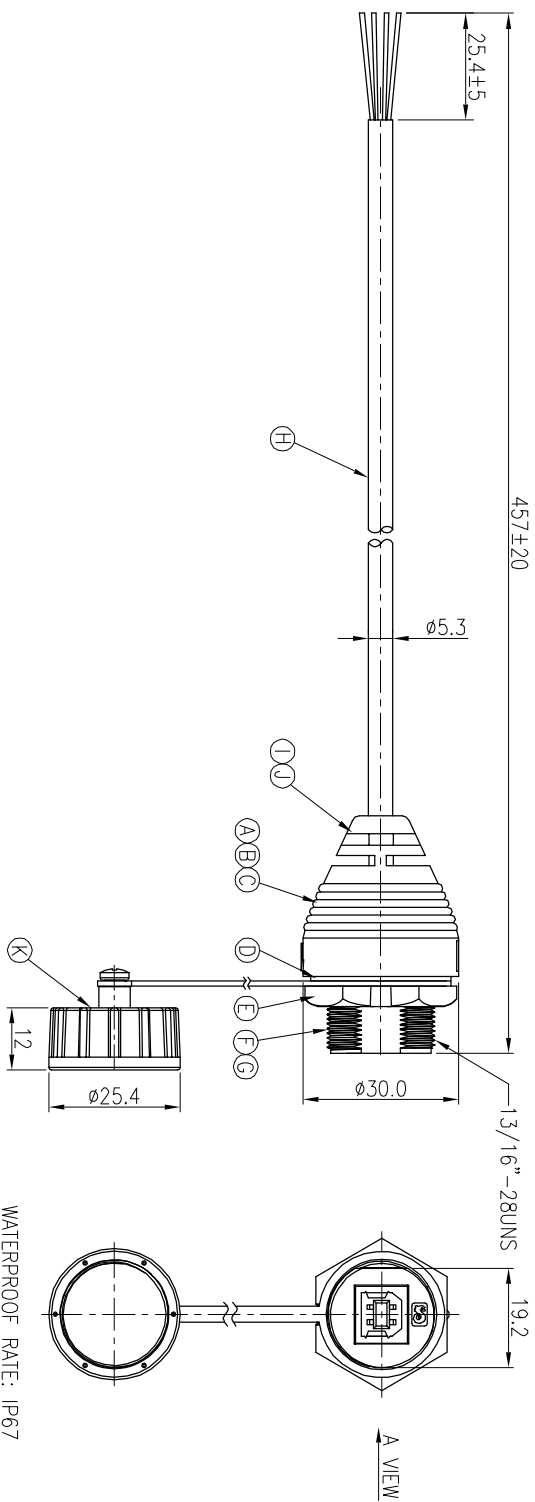


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	NO:1191003-4A	JF	2020.05.07



WATERPROOF RATE: IP67  
Conn.

BROWN	4
BLUE	3
WHITE	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
  2. RATING: 30V 1A
  3. SPECIFICATIONS:SEE "USB SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
  6. FOR PANEL THICKNESS MAX:2.5mm

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
K	WATERPROOF CAP	1	P/N:2UB3001-W0000W	N/A
J	INNER MOLD	1	LD-PE	NATURAL
I	OVER MOLD	1	TPU	BLACK
H	CABLE	1	UL2464 20#*4C UV Resistant OD5.3mm	BLACK(PVC JACKET)
G	USB B JACK	1	USB B TYPE	WHITE PLASTIC
F	BODY	1	PPE	BLACK
E	PANEL NUT	1	PPE	BLACK
D	GASKET	1	EPDM	BLACK
C	HEAT SHRINK TUBE	1	125°C Ø1.0	BLACK
B	LIQUID GLUE	1	N/A	BLACK
A	PCB	1	FR-4	GREEN

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

TITLE	WATERPROOF	USB 2.0 B TYPE	JACK
DRW	JF	PART NO.2UB3003-W05120H	
CHKD	Cerry	SCALE 1:1	UNIT: mm
APVD	William	SIZE: A3	SHEET: 1 OF 1

REV: A

CUSTOMER COPY