


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A171215-1A	JF	2018.01.15
B	ECN NO.: S202110-E01	JAY	2021.09.01

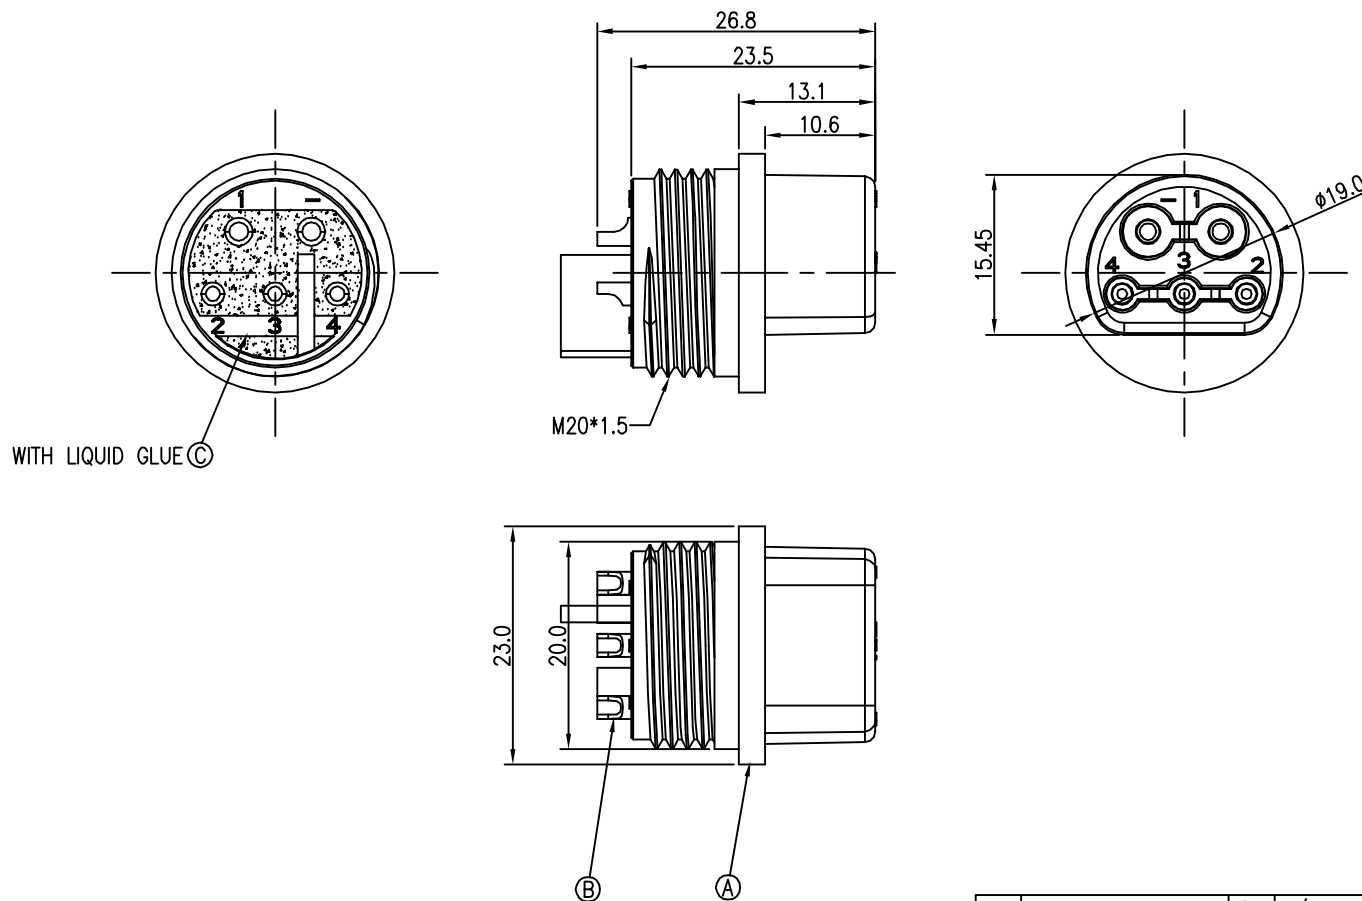

NOTES:

- TEST CONDITIONS:
2-1. CONDUCTANCE RESISTANCE 20m Ohm Max.
2-2. HI-POT TEST 500VAC,0.5mA(1SEC)
2-3. INSULATION RESISTANCE: 100M Ohm Min. BY 500 VDC
- SPECIFICATIONS:SEE "BA SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

C	LIQUID GLUE	1	N/A	BLACK
B	MALE PIN	5	C3604	1~3GOLD PLATING OVER NICKEL PLATING
A	FEMALE BODY	1	PA66+GF(A63V0GV25)	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: ANGLES:		TITLE BATTERY CONNECTOR(IP67) FEMALE CONN. MALE (2+3)PIN(10+5A)		
X	:±0.30	X	:±1°	DWN JAY
X.X	:±0.20	X.X	:±0.5°	CHKD MF
X.XX	:±0.10	APVD JF	SCALE 2:1	UNIT: mm
X.XXX	:±0.05	SIZE: A3	SHEET:1 OF 1	REV: B
CUSTOMER COPY				