
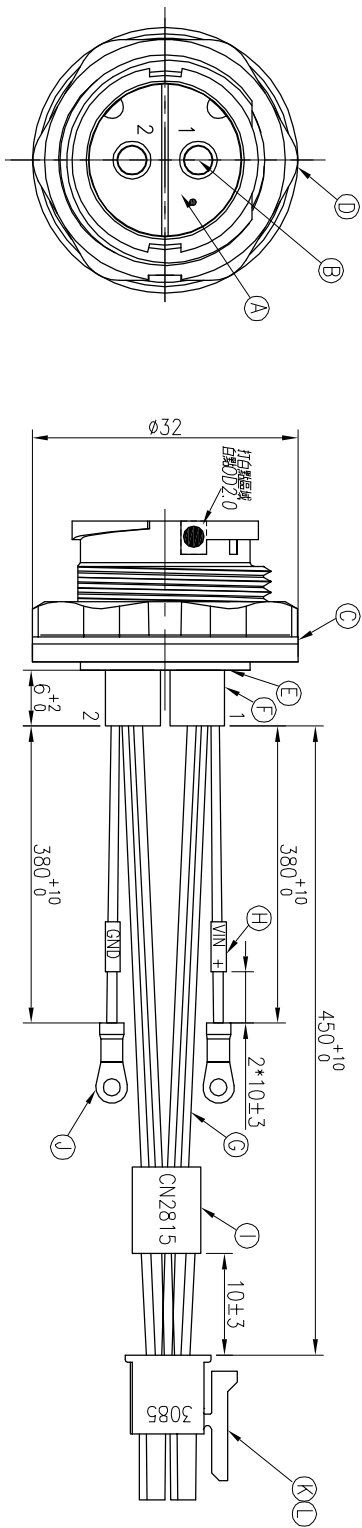




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
1	PDR	NO:1200417-1B	RZ	2020.05.06
2	DCR	NO:1200417-1B-001-C	RZ	2020.07.10



F	 23.50 ø25.6			
E	RECOMMENDED PANEL CUT-OUT			
D				
C	2	BLACK	PIN 6	CN2815
			PIN 4	
			PIN 2	
C	1	RED	PIN 5	CN2815
			PIN 3	
			PIN 1	
B	VIN +			
	CONN.1	WIRE COLOR	HOUSING	MARK TUBE
A			 POS.1 POS.4 3.00 POS.3 POS.6	
Pin Assignments Front View				

DELTA	P/N	3082390900
Singatron	P/N	2CG3002-W02G07H
REV.		01

- NOTES:
- CURRENT RATING:5A
 - CONTACT RESISTANCE: 3 Ohm MAX.
 - TEMPERATURE RANGE:-25°C TO +85°C.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **6017408**
 - FOR PANEL THICKNESS MAX OF 3.5mm

L	HOUSING	1	TYU3085HNO-2*03	BLACK
K	TERMINAL	6	TYU3085TGH-A-DH	TINNED
J	TERMINAL	2	KST RVST1-4	TINNED
I	TUBE	1	125°C 600V	BLACK
H	TUBE	2	125°C 600V	BLACK
G	WIRE	8	UL1007 18AWG	SEE PIN OUT
F	TUBE	2	125°C 600V	BLACK
E	LIQUID GLUE	1	N/A	BLACK
D	NUT	1	NYLON	BLACK
C	GASKET	1	EPDM	BLACK
B	MALE PIN	2	Brass	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES: TITLE				
X :+0.5 X :+/-2				
X.X :+0.3 X.X :+/-1				
X.XX :+0.2				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
CIRCULAR LARGE SIZE (SOLDER/LOCK TYPE)				
MALE CONN. MALE 2PIN				
DWN	RZ	PART NO.	2CG3002-W02G07H	
CHKD	Cerry	SCALE 2:1	UNIT: mm	
APVD	William	SIZE: A3	SHEET:1 OF 1	REV: 2
CUSTOMER COPY				