


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S130611-3B	JF	2013.11.11	
B	ECN NO.:S140802	JF	2014.09.03	
C	ECN NO.:S151202-C	JF	2015.12.14	

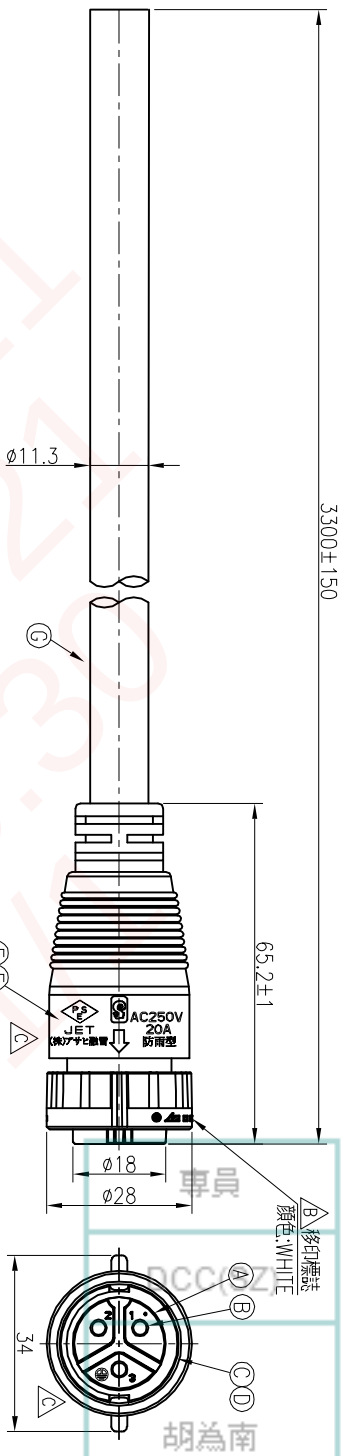


CONN.

WATERPROOF RATE: IP67

GREEN	3
WHITE	2
BLACK	1
Wire Color	Conn.

Pin Out

Conn.



Pin Assignments
Front View 前视图

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 20A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **RoHS PASS**

G	CABLE	1	PSE 2PNCCT 3*2.0mm ² OD=11.3mm	BLACK(RUBBER JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PC9330	BLACK
B	FEMALE PIN	3	Phosphor Bronze	(1~3u") GOLD PLATING OVER NICKEL PLATING
A	FEMALE BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
SINGATRON ENTERPRISE CO., LTD. 信營企業股份有限公司				
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	CIRCULAR LARGE SIZE (IP67) FEMALE CONN FEMALE PIN (3PIN) LOCK TYPE		
X.X :±0.3	X.X :±1°	DWN	JF	PART NO.:2CG3004-W03603H
X.XX :±0.2		CHKD	Yang	SCALE 1:1 UNIT: mm
		APVD	Horlen	SIZE: A3 SHEET:1 OF 1 REV: C

CUSTOMER COPY