



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S130723-7B	JF		2013.11.11

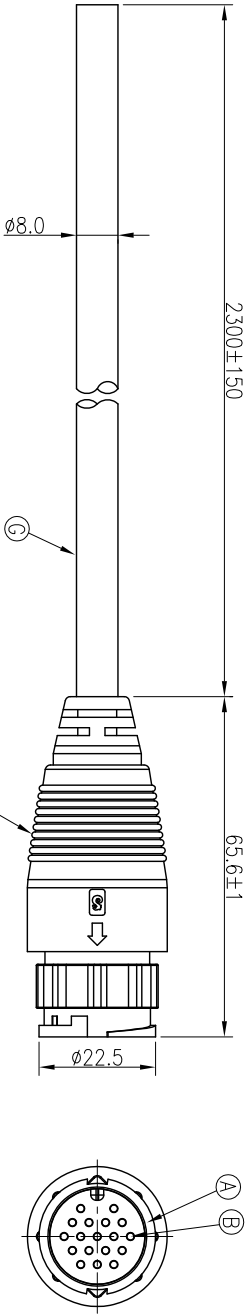

Blue/White	藍/白	18
Green/White	綠/白	17
Orange/White	橙/白	16
Red/White	紅/白	15
Brown/White	棕/白	14
Black/White	黑/白	13
Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. CURENT RATING: 5A
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**
 5. REPRESENT CRITICAL DIMENSIONS.



G	CABLE	1	UL2464 24#*18C+AL UV RESISTANT	BLACK(PVC JACKET)
E	HEAR SHRINK TUBE	18	Ø1.5 300V 125°	BLACK
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	PVC	BLACK
B	MALE PIN	18	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
SINGATRON ENTERPRISE CO., LTD. 信音企業股份有限公司				
TITLE CIRCULAR LARGE SIZE (IP67) MALE CONN. MALE 18 PIN LOCK TYPE				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
XX :±0.3	XX :±1°			
XXX :±0.2				
APVD	Quon	SIZE: A3	SHEET:1 OF 1	REV: A

CUSTOMER COPY

1

2

3

4

5

6

7

8