




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S120705-6B	Shown	2013.08.05
B	ECN NO.:S151202-C	JF	2015.12.14



2015/12/18
08:30:13

WITH LIQUID GLUE

胡為南

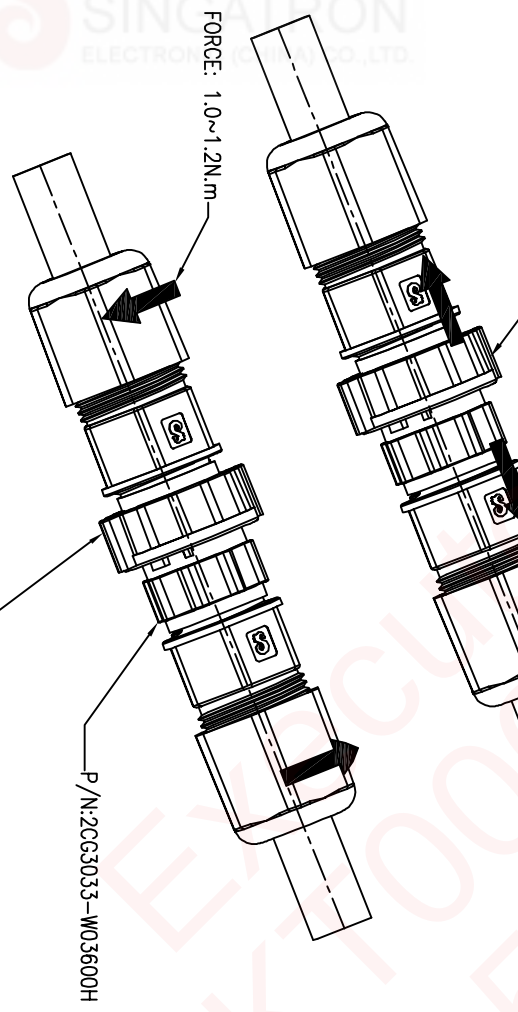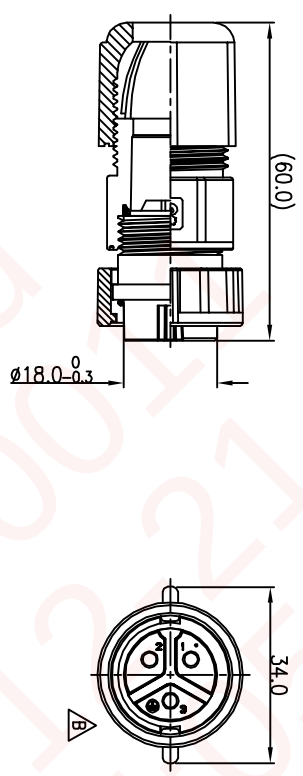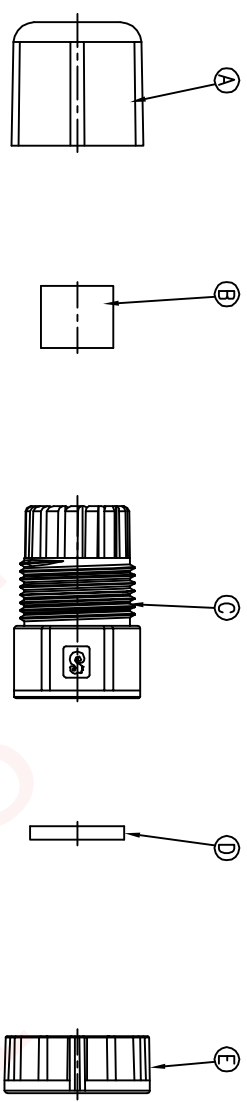

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 20A
 3. SEAL FOR CABLE OD:φ6.0mm~φ12.0mm
 4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 

I	LIQUID GLUE	1	N/A	BLACK
H	O-RING	1	EPDM	BLACK
G	BODY	1	PA66+30%GF	BLACK
F	FEMALE PIN	3	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
E	LOCK NUT	1	PC 9330	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PC 9330	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC 9330	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS: ANGLES: TITLE (CIRCULAR LARGE SIZE (IP67) FEMALE CONN. FEMALE 3 PIN (20A) LOCK TYPE)				
X	:±0.5	X	:±2°	DWN JF PART NO.20CG3032-W03600H
XX	:±0.3	XX	:±1°	CHKD Yang SCALE 2:1 UNIT: mm
XXX	:±0.2			APVD Harlen SIZE: A3 SHEET:1 OF 1 REV: B

CUSTOMER COPY