
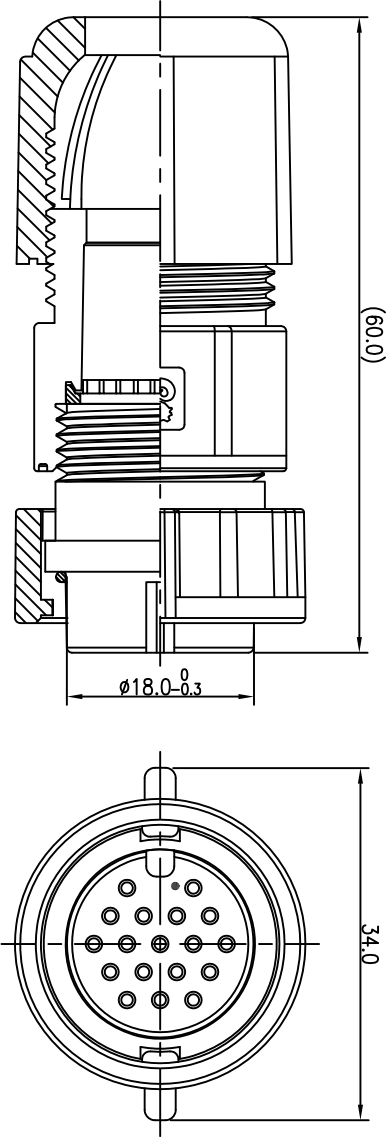


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S130723-7C	JF	2013.11.11

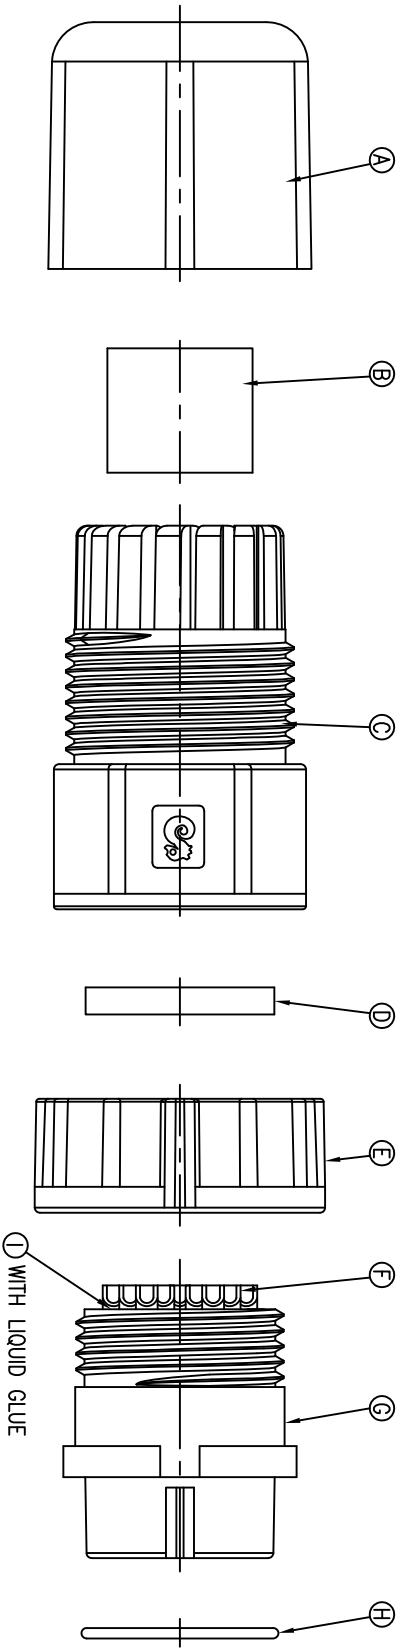

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. SEAL FOR CABLE OD: $\phi 6.0\text{mm} \sim \phi 12.0\text{mm}$
4. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

I	LIQUID GLUE	1	N/A	BLACK
H	O-RING	1	EPDM	BLACK
G	BODY	1	PA66+30%GF	BLACK
F	FEMALE PIN	18	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
E	LOCK NUT	1	PC	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PC	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
SINGATRON ENTERPRISE CO., LTD.				
TITLE: CIRCULAR LARGE SIZE (IP67) FEMALE CONN. FEMALE 18 PIN (5A) LOCK TYPE				
DECIMALS:	ANGLES:	DWN	JF	PART NO. 2CG3032-W18300H
X : ± 0.5	X : $\pm 2^\circ$	CHKD	Horlen	SCALE 2:1 UNIT: mm
XX : ± 0.3	XX : $\pm 1^\circ$	APVD	Quon	SIZE: A3 SHEET: 1 OF 1 REV: A
XXX : ± 0.2		CUSTOMER COPY		