



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S130424-2C	JF	2013.11.11	

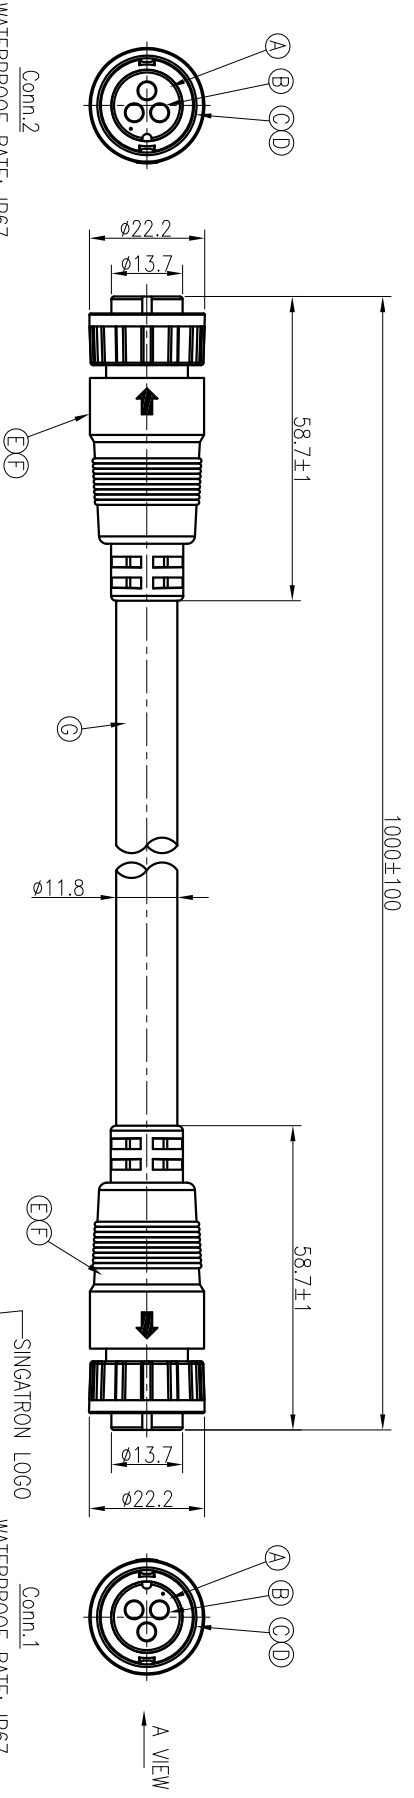

3	YELLOW/GREEN	3
2	BLUE	2
1	BROWN	1
CONN.2	WIRE COLOR	CONN.1

PIN OUT



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 16A
 3. OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES SPEC".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GREEN PASS**

G	CABLE	1	H07RN-F 450/750 3G*2.5mm²	BLACK(RUBBER JACKET)
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	2	EPDM	BLACK
C	LOCK NUT	2	NYLON+GF	BLACK
B	FEMALE PIN	6	Phosphor Bronze	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	2	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
SINGATRON ENTERPRISE CO., LTD. 信昌企業股份有限公司				
TITLE CIRCULAR WIDLE SIZE (IP67) FEMALE CONN. FEMALE 3PIN(16A) LOCK TYPE				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
CHKD	Harlen	SCALE 1:1	UNIT: mm	REV: A
APVD	Quan	SIZE: A3	SHEET:1 OF 1	

CUSTOMER COPY