




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T160122-2A	Blues	2016.7.4	

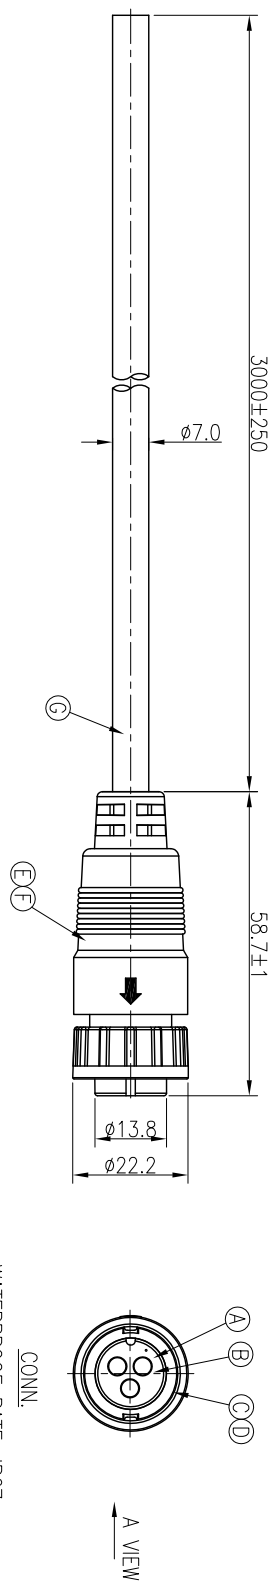

WATERPROOF RATE: IP67

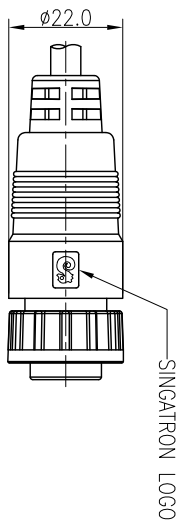

3	BLACK
2	BLUE
1	BROWN
CONN.	WIRE COLOR
PIN OUT	
CONN.	



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
RATING: 300V AC/DC 16A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

H	HEAT SHRINK TUBE	3	125C° 300V $\phi 4.0$	BLACK
G	CABLE	1	UL2464 16AWG*3C+ A/MY (UV) OD7.0	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	3	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
SINGATRON ENTERPRISE CO., LTD. 信音企業股份有限公司				
TITLE CIRCULAR MIDDLE SIZE (IP67) FEMALE CONN. FEMALE 3PIN(16A) LOCK TYPE				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
APVD	Steve	SIZE: A4	SHEET:1 OF 1	REV: A

CUSTOMER COPY