






REV	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.: T240221	~2A	Jun	2026.06.25

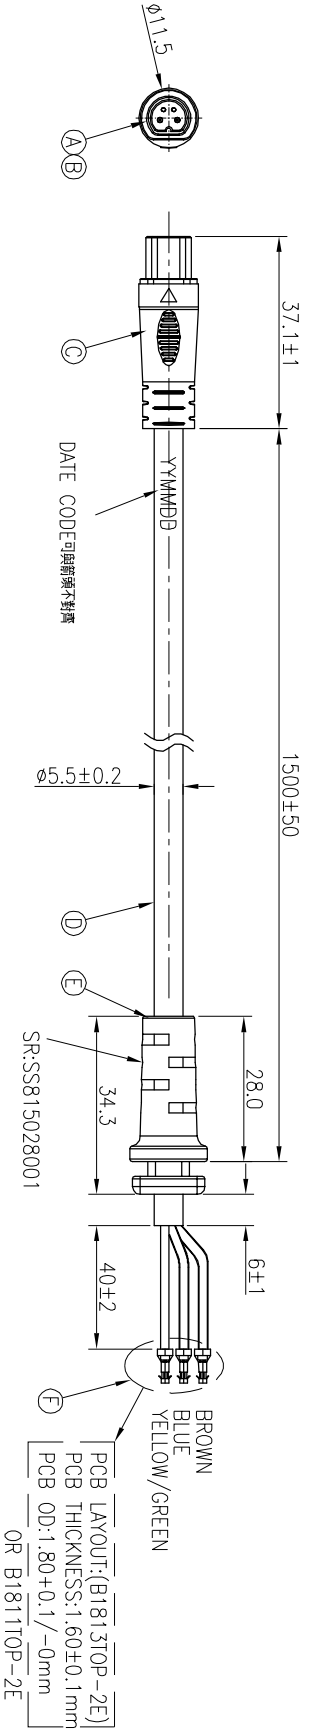

- NOTES:
- TEST CONDITIONS:
 - 1-1. RATING: 5A+2A.
 - 1-2. TEMPERATURE RANGE: -20°C TO +80°C.
 - 1-3. CONDUCT RESISTANCE: 3 Ohm Max.
 - 1-4. HI-POT TEST 500VAC 5mA(1MINUTE)
 - 1-5. INSULATION RESISTANCE: 100MΩmm Min. BY 500 VDC
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PA88**
 - DATE CODE(LASER): YYMMDD
 - 01~31
 - 01~12
 - 01~99

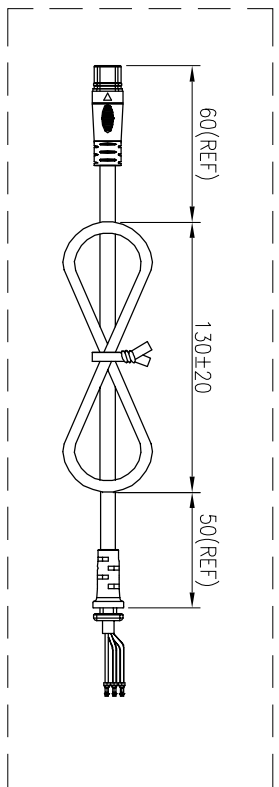

4	B1813	YELLOW/GREEN
3		
2	B1813	BLUE
1	B1813	BROWN
CONN. TERMINAL WIRE COLOR		
PIN DEFINE		

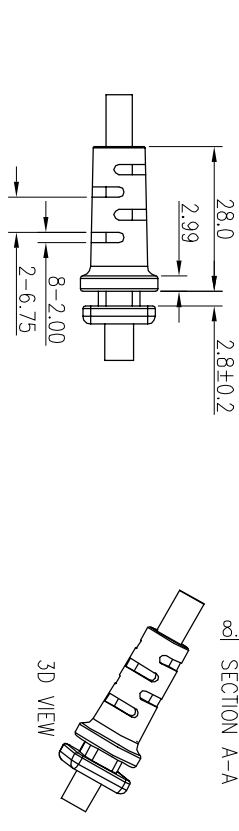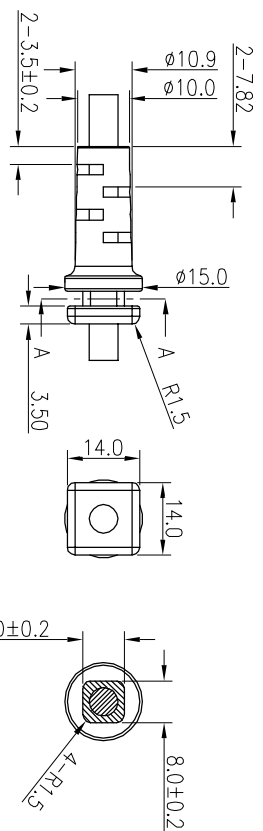

F	TERMINAL	3	JWT B1813TOP-2E	TIN-PLATED
E	SR	1	PVC 60P UL94V-0	BLACK
D	CABLE	1	H03W-F 3*0.5mm ² OD5.5	BLACK (PVC JACKET)
C	OVER MOLD	1	PLASTIC	BLACK
B	MALE PIN	4	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PLASTIC	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	±0.5	X	±1°	
X.X	±0.3	X.X	±0.5°	
X.XX	±0.2			
Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信益汽車電子有限公司				
TITLE E-BIKE SERIES 180° 4 PIN MALE CONN.				
DWN	Jun	PART NO.	2EB3024-W04705H	
CHKD	Allen	SCALE 1:1	UNIT: mm	
APVD	Lioo	SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY				