
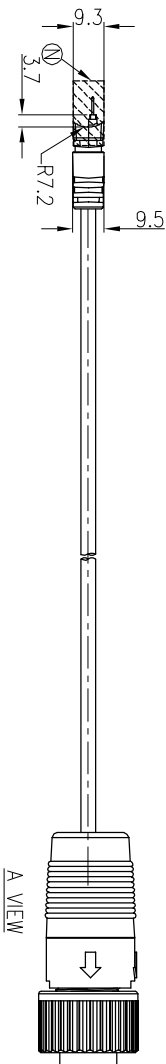


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A230412-1A		MF	2023.06.09

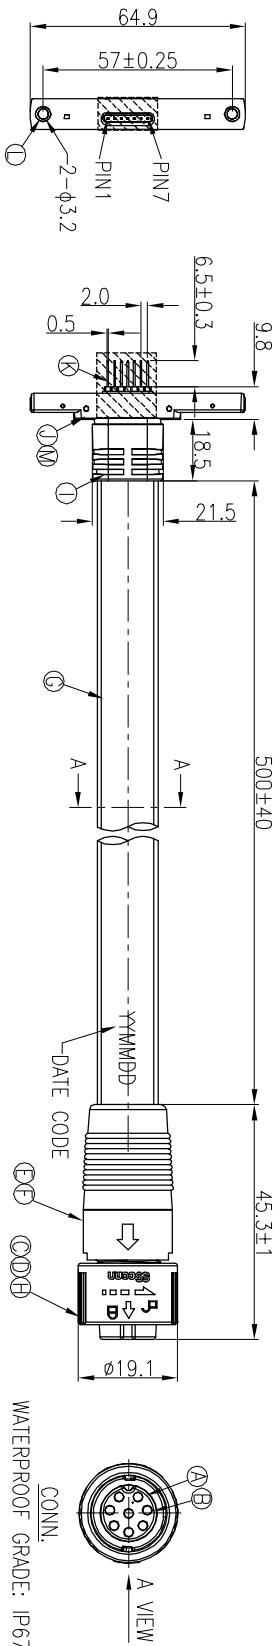

N	SHEATH	1	PP	BLACK
M	PCB	1	FR-4	GREEN
L	SPACER	2	BRASS	NI PLATED
K	PIN HEADER	1	7PIN PITCH=2mm	BLACK
J	BODY MOLD	1	PP	BLACK
I	SR MOLD	1	PP	BLACK
H	SPRING	1	SUS	N/A
G	CABLE	1	UL2725 20AWG*2C+22AWG*5C 002.75±0.15*11.8±0.25mm	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	BLACK
E	OVER MOLD	1	PP	BLACK
D	O-RING	1	SILICONE	BLUE
C	LOCK NUT	1	PC	GRAY
B	FEMALE PIN	8	PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

- NOTES:
1. WATERPROOF GRADE: IP67
 2. ELECTRICAL CHARACTERISTICS
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS"
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GREEN**
 6. LASE DATE CODE "YYMMDD" ON TOP OF CONN.
- CURRENT RATING: 5A
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- TEMPERATURE RANGE: -20°C TO +80°C
- DATE CODE: YYMMDD
- DAY MONTH YEAR

DECIMALS:	ANGLES:	TITLE
X :±0.5	X :±2°	CIRCULAR STANDARD SIZE (QUICK TYPE)
X.X :±0.3	X.X :±1°	FEMALE CONN. MALE PIN
X.XX :±0.2		PART NO. 2QT3004-W08318H
		CHKD ALLEN SCALE 1:1 UNIT: mm
		APVD LAO SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY