REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:T110310-14A	LILY	2011.12.27
B	ECN NO.:S121109	YF	2014.03.27



RECOMMENDED PANEL CUT-OUT

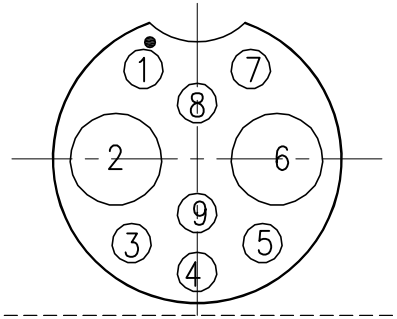

PIN ASSIGNMENTS
FRONT VIEW

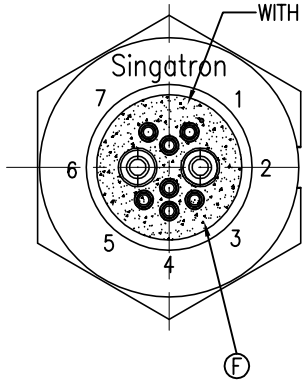

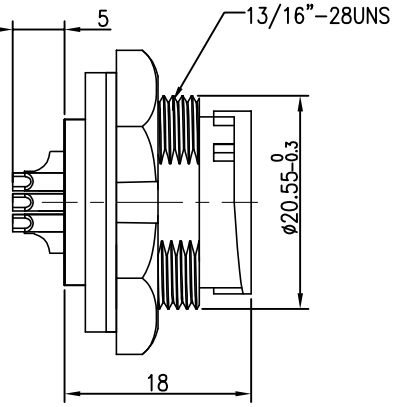

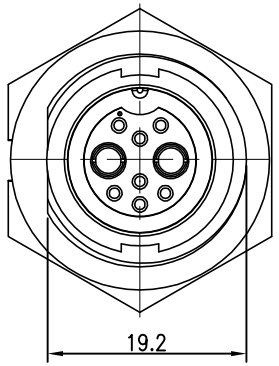

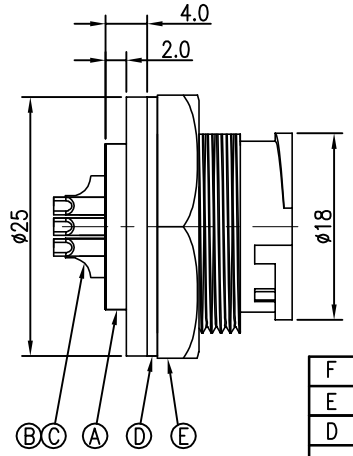

F	LIQUID GLUE	1	N/A	BLACK
E	NUT	1	NYLON+33%GF	BLACK
D	GASKET	1	EPDM	BLACK
C	FEMALE PIN	7	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
B	FEMALE PIN	2	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

NOTES:
1. WATERPROOF RATE: IP67
   IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 2+20A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.F. PASS
6. FOR PANEL THICKNESS MAX OF 3.5mm

UNLESS OTHERWISE SPECIFED TOLERANCES	Singatron Enterprise Co., Ltd. 信音企業股份有限公司			
DECIMALS: ANGLES: X :±0.5 X :±2° X.X :±0.3 X.X :±1° X.XX :±0.2	TITLE	CIRCULAR MIDDLE SIZE (SOLDER/LOCK TYPE) MALE CONN. FEMALE (2+7)PIN(2+20A)		
	DWN	YF	PART NO.2CM3014-W09E00H-AB	
	CHKD	Harlen	SCALE 2:1	UNIT: mm
	APVD	Quan	SIZE: A3	SHEET:1 OF 1 REV:B
	CUSTOMER COPY			

文件編號 RD-06-043-A