





REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO:S101109-8A	Shown	2010.12.16	

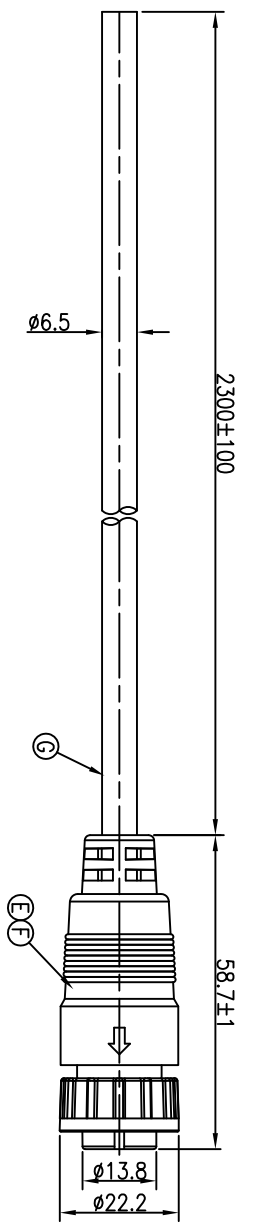

CONN.
WATERPROOF RATE: IP67

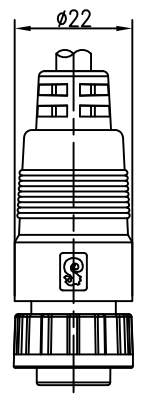

5	YELLOW
4	ORANGE
3	RED
2	BROWN
1	BLACK
CONN.	WIRE COLOR
PIN OUT	
CONN.	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
 2. IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 3. CURRENT RATING: 2+16A
 4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [G.P. PASS]

G	CABLE	1	UL2464 (16AWG*2C+A) +24AWG*3C+A UV RESISTANT OD=φ6.5	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	5	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION		MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE: CIRCULAR MIDDLE SIZE (IP67)				
DWN: Shown				
CHKD: Steve				
APVD: Max				
PART NO. 2CM3016-W05B03				
SCALE 1:1 UNIT: mm				
SIZE: A3 SHEET: 1 OF 1 REV: A				
CUSTOMER COPY				